



SDC36

Super DigitroniK Single Loop Controller

The DigitroniK SDC36 is a digital indicating controller featuring multiple input types and a PID control system using the new "RationalLOOP" and "Just-FITTER" algorithms.

Up to two control outputs (depending on the exact model) can be used, which are selectable from relay, voltage pulse, continuous voltage, and current output.



DIGITAL CONTROLLERS

Specifications

PV input	Type	Selectable from multiple input types: thermocouple, RTD, DC current and DC voltage					
	Sampling cycle	0.1s					
Indication	Indication method	4-digit, 7-segment LED. (PV: Upper green display, SP: Lower orange display)					
	Indication accuracy	± 0.1% FS ± 1 digit. In the negative area of the thermocouple, the accuracy is ±0.2% FS ± 1 digit (at an ambient temperature of 23 ± 2°C)					
Control output	Model No. Segment II	R0	R1	V0	VC	VD	VV
	Control output 1	Relay	Motor drive relay	Voltage pulse (for SSR drive)	Voltage pulse (for SSR drive)	Voltage pulse (for SSR drive)	Voltage pulse (for SSR drive)
	Control output 2	-	-	-	Current	Continuous voltage	Voltage pulse (for SSR drive)
	Model No. Segment II	C0	CC	CD	D0	DD	
	Control output 1	Current	Current	Current	Continuous voltage	Continuous voltage	
	Control output 2	-	Current	Continuous voltage	-	Continuous voltage	
	Control action	ON/OFF control, Time proportional PID, Current proportional PID					
	No. of PID groups	Max. 8					
	PID auto-tuning	Automatic PID value setting by limit cycle method. However, one of the following 3 control characteristics can be selected: • Standard • Quick disturbance response • Less up-down fluctuations					
	Remote switch input	No. of inputs	Max. 4				
Event	No. of outputs	2 to 3 (according to the model)					
	Type	PV high limit, PV low limit, PV high/low limit, Deviation high limit, Deviation low limit, Deviation high/low limit, etc.					
Communications		RS-485					
Current transformer inputs		2 (option)					
General	Power	AC model: 100 to 240Vac 50/60Hz DC model: 24Vac 50/60Hz / 24Vdc					
	Power consumption	AC model: 12VA max. DC model: 12VA max. (24Vac), 8W max. (24Vdc)					
	Standards compliance	CE: EN61010-1, EN61326 cUL: File No. E246616					
	Mass	Approx. 300g (including socket)					

Accessories (sold separately)

Model No.	Description
SLP-C35J50	Smart Loader software with user's manual and loader cable
SLP-C35J51	Smart Loader software without user's manual and loader cable
QN206A	Current transformer (5.8mm dia.)
QN212A	Current transformer (12mm dia.)
81446916-001	Hard cover
81441122-001	Soft cover
81446913-001	Terminal cover

Selection Guide

I II III IV V VI VII Example: C36TR0UA1000

Segment	Model No. selection		Description					
I	Basic No.	C36T	Single loop controller					
II	Control output		Output 1	Output 2	Remarks			
		R0	Relay	-	-			
		R1	Motor drive relay	-	w / MFB			
		V0	Voltage pulse (for SSR drive)	-	-			
		VC	Voltage pulse (for SSR drive)	Current	-			
		VD	Voltage pulse (for SSR drive)	Continuous voltage (note 1)	-			
		VV	Voltage pulse (for SSR drive)	Voltage pulse (for SSR drive)	-			
		C0	Current	-	-			
		CC	Current	Current	-			
		CD	Current	Continuous voltage (note 1)	-			
		D0	Continuous voltage (note 1)	-	-			
		DD	Continuous voltage (note 1)	Continuous voltage (note 1)	-			
		III	PV input	U	Universal (full multi) input			
		IV	Power	A	100 to 240Vac 50/60Hz			
D	24Vac 50/60Hz, 24 to 48Vdc							
V	Option 1		EV (digital outputs)		Auxiliary output			
		1	3	-				
		2	3	Current				
		3	3	Voltage				
		4	2 independent outputs	-				
		5	2 independent outputs	Current				
		6	2 independent outputs	Voltage				
VI	Option 2		2 CT inputs (note 2)	Digital inputs (DI)	RSP	RS-485 communications		
		0	-	-	-	-		
		1	4	4	-	0		
		2	4	4	-	0		
		3	2	2	0	-		
4	2	2	0	0				
VII	Option 3	00	None					
		D0	With test data					
		T0	Tropicalization					
		K0	Antisulfidization					
		B0	Tropicalization + test data					
		L0	Antisulfidization + test data					
		Y0	With traceability certification					

* A circle (○) denotes availability.

Notes: 1. Selectable from 1-5V, 0-5V and 0-10V.

2. Current transformer input is not available if R1 control output is selected.

Input Types and Ranges


Range code	Input type	Range (°C)	Range code	Input type	Range (°C)	Range code	Input type	Range (°C)	Range code	Input type	Range (°C)
1	K	-200 to +1200	17	B	0 to 1800	47	Pt100	-100.0 to +200.0	63	Pt100	0.0 to 200.0
2		0 to 1200	18	N	0 to 1300	48	JPt100	-100.0 to +200.0	64	JPt100	0.0 to 200.0
3		0.0 to 800.0	19	PL II	0 to 1300	49	Pt100	-100.0 to +150.0	65	Pt100	0.0 to 300.0
4		0.0 to 600.0	20	Wre5-26	0 to 1400	50	JPt100	-100.0 to +150.0	66	JPt100	0.0 to 300.0
5		0.0 to 400.0	21		0 to 2300	51	Pt100	-50.0 to +200.0	67	Pt100	0.0 to 500.0
6		-200.0 to +400.0	22	Ni-NiMo	0 to 1300	52	JPt100	-50.0 to +200.0	68	JPt100	0.0 to 500.0
7		-200.0 to +200.0	23	PR40-20	0 to 1900	53	Pt100	-50.0 to +100.0	81	0 to 10mV	Scaling range is -1999 to +9999. Decimal point position changeable.
8	0 to 1200	24	DIN U	-200.0 to +400.0	54	JPt100	-50.0 to +100.0	82	-10 to +10mV		
9	0.0 to 800.0	25	DIN L	-100.0 to +800.0	55	Pt100	-60.0 to +40.0	83	0 to 100mV		
10	0.0 to 600.0	26	Gold-iron/Chromel	0.0 to 360.0K (K: Kelvin)	56	JPt100	-60.0 to +40.0	84	0 to 1V		
11	-200.0 to +400.0	41	Pt100	-200.0 to +500.0	57	Pt100	-40.0 to +60.0	86	1 to 5V		
12	0.0 to 800.0	42	JPt100	-200.0 to +500.0	58	JPt100	-40.0 to +60.0	87	0 to 5V		
13	0.0 to 600.0	43	Pt100	-200.0 to +200.0	59	Pt100	-10.00 to +60.00	88	0 to 10V		
14	T	-200.0 to +400.0	44	JPt100	-200.0 to +200.0	60	JPt100	-10.00 to +60.00	89	0 to 20mA	
15	R	0 to 1600	45	Pt100	-100.0 to +300.0	61	Pt100	0.0 to 100.0	90	4 to 20mA	
16	S	0 to 1600	46	JPt100	-100.0 to +300.0	62	JPt100	0.0 to 100.0			

• °F display is selectable.

Dimensions

(Unit: mm)

• SDC36

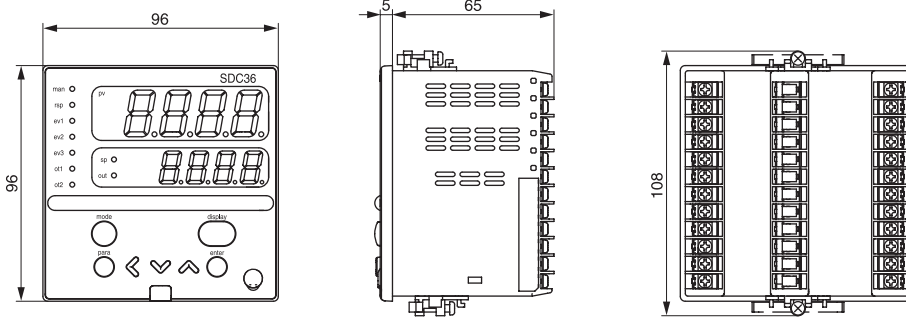

• Panel cutout

