

# DigitroniK Programmable Controller DCP552 Mark II

The DigitroniK DCP552 Mark II is a high-function programmable controller supporting two channels (up to 49 program patterns per channel) to which thermocouple, resistance temperature detector (RTD), DC voltage, DC current and other signals can be input.


The DCP552 Mark II supports a memory card interface, 16 event outputs, 16 external switch inputs and a wide range of other functions as part of the standard specification.

## FEATURES

- Accuracy of  $\pm 0.1\%FS$ . Easy-to-view large display characters. Compact design
  - Any input type can be selected by console key operation.
  - Easy operation aided by guidance messages
  - Up to 49 program patterns can be stored to each channel and up to 99 segments can be programmed to each pattern.
  - Program patterns can be saved or loaded using the Smart Proximity Card SKM series (sold separately).
  - The Smart Proximity Card SKM series uses highly durable and non-contact type cards
  - Any event can be selected to each channel and set for the 16 event outputs, and code events comprising a combination of two or more points can be set.
  - 16 external switch inputs allow the control of remote selection of program Nos. or operation on each channel separately or both channels simultaneously
  - CE marking-compatible
- Applicable standards: EN61010-1, EN50081-2, EN50082-2



## BASIC FUNCTION BLOCKS of DCP552 Mark II

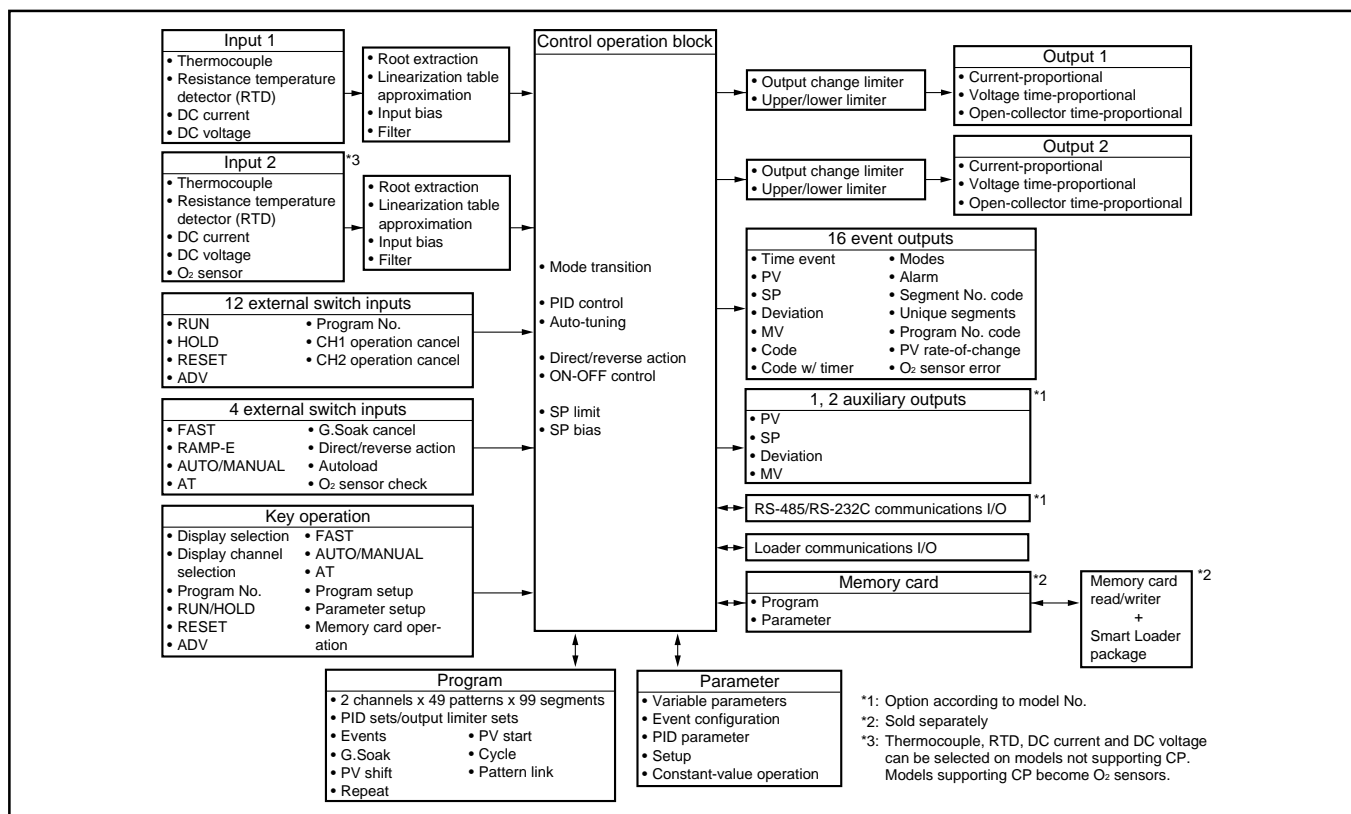

## SPECIFICATIONS

Program	<b>Number of programs</b>	49 programs x 2 channels
	<b>Number of segments</b>	99 per program, total 2000
	<b>Segment setting system</b>	RAMP-X: Set by set points (SP) and time. RAMP-T: Set by set points (SP) and ramp ( $\theta$ ) RAMP-E: Set by set points (SP) and $\Delta$ SP per external switch input 1 pulse
	<b>Segment time</b>	0 to 500 hours 0 minute, 0 to 500 minutes 0 second, 0.0 to 3000.0 seconds (time unit selectable)
	<b>Segment ramp</b>	1 to 10000 U/hour, 1 to 10000 U/minute, 1 to 10000 U/second (time unit selectable)
	<b>Segment <math>\Delta</math>SP</b>	1 to 10000 U/1 pulse
	<b>Number of sub-functions</b>	4000
	<b>Sub-function action</b>	Events, PID set, output limiter set, G.Soak, PV shift, repeat
	<b>Events (16)</b>	Set operating point corresponding to event type
	<b>PID set No.</b>	Set 0 (continuation of previous segment), 1 to 9, A set (automatically switched) and ON-OFF control
	<b>Output limiter set</b>	Set 0 (continuation of previous segment), 1 to 9
	<b>G.Soak</b>	Set type (start/end points and overall) and G.Soak width 0 to 1000 U.
	<b>PV shift</b>	-10000 to +10000 U
	<b>Repeat</b>	Set return destination segment No. and repeat count.
	<b>PV start</b>	Set type (rising/falling or both) for each program.
	<b>Cycle</b>	Set cycle count for each program.
	<b>Pattern link</b>	Set program No.0 to 49 (0: no link) for each program.
	<b>Tag</b>	Set 8 alphanumeric or symbols for each program.
	<b>Basic time accuracy</b>	$\pm 0.01\%$ (segment time setting = 0, with 0.1 second delay for each repeat and cycle)
Inputs	<b>Input type</b>	Thermocouple, resistance temperature detector (RTD), DC voltage, DC current multi-range (See pages 6, 7.)
	<b>Sampling cycle</b>	0.1 seconds
	<b>Input bias current</b>	Thermocouple, DC voltage input: Max. $\pm 1.3 \mu\text{A}$ (at peak value and reference conditions) 1 V or higher range: Max. $-3 \mu\text{A}$
	<b>Input impedance</b>	DC current input: approx. $50 \Omega$ (under operating conditions)
	<b>Measuring current</b>	RTD input: Approx. 1 mA current flow from terminal A (under operating conditions)
	<b>Influence of wiring resistance</b>	Thermocouple, DC voltage input: Thermocouple: $0.5 \mu\text{V}/\Omega$ DC voltage (max. 1 V range): $0.5 \mu\text{V}/\Omega$ DC voltage (5 V range): $3 \mu\text{V}/\Omega$ DC voltage (10 V range): $6 \mu\text{V}/\Omega$  RTD input: Max. $\pm 0.01\% \text{FS}/\Omega$ in wiring resistance range 0 to $10 \Omega$ Range of F01, F33, P01 and P33: $\pm 0.02\% \text{FS}/\Omega$ max.
	<b>RTD input allowable wiring resistance</b>	<ul style="list-style-type: none"> <li>Ranges other than F01, F33, P01 and P33: <math>85 \Omega</math> max. (including Zener barrier resistance. Note that site adjustment is required.)</li> <li>Ranges of F01, F33, P01 and P33: <math>10 \Omega</math> max. (Zener barrier cannot be used.)</li> </ul>
	<b>Allowable parallel resistance</b>	Thermocouple disconnection detection allowable parallel resistance: $1 \text{ M}\Omega$ min.
	<b>Max. allowable input</b>	Thermocouple, DC voltage input: $-5$ to $+15\text{V}$ dc DC current input: $50 \text{ mA}$ dc, $2.5\text{V}$ dc
	<b>Burnout</b>	Detection selectable
	<b>Over-range detection threshold</b>	$110\% \text{FS}$ min.: Upscaled $-10\% \text{FS}$ max.: Downscaled (Note that F50 range is not downscaled.)
	<b>Cold-junction compensation accuracy</b>	$\pm 0.5^\circ\text{C}$ (under standard conditions)
	<b>Cold-junction compensation system</b>	Internal/external ( $0^\circ\text{C}$ only) compensation selectable
	<b>Scaling</b>	$-19999$ to $+20000 \text{ U}$ (possible in case of linear input only. Inverse scaling possible. Decimal point position settable at any point)
	<b>Square root extraction</b>	Possible. Dropout: 0.2 to 10.0% in case of DC current or DC voltage range
	<b>PV equalizer (linearization table approximation)</b>	PV1: 9 segments (10 points set) PV2: 9 segments (10 points set) CP: 9 segments (10 points set)
	<b>Input bias</b>	$-1000$ to $+1000 \text{ U}$ variable
	<b>Digital filter</b>	0.0 to 120.0 seconds variable (0.0: filter OFF)

External switch inputs	<b>Number of inputs</b>	16	
	<b>Types of connectable outputs</b>	Dry contacts (relay contact) and open-collector (current sink to ground)	
	<b>Terminal voltage (open)</b>	8.5 V±0.5 V between common terminals (terminals ⑫ , ④⑩) and each input terminal (under operating conditions)	
	<b>Terminal current (short-circuit)</b>	Approx. 6 mA between each terminal (under operating conditions)	
	<b>Allowable contact resistance (dry contact)</b>	ON: 250 Ω max. (under operating conditions) OFF: 100 kΩ min. (under operating conditions)	
	<b>Voltage drop (at open-collector ON)</b>	2 V max. (under operating conditions)	
	<b>Leakage current (at open-collector OFF)</b>	0.1 mA max. (under operating conditions)	
	<b>Parallel connection with other instruments</b>	Can be connected to Yamatake Corporation SDC40 and SDC10 series	
	<b>Assignments (fixed)</b>	RUN, HOLD, RESET, ADV, program No., CH1 operation cancel, CH2 operation cancel	
	<b>Assignments (variable)</b>	RAMP-E, FAST, AT, AUTO/MANUAL, G.Soak cancel, auto-load, O <sub>2</sub> sensor check	
	<b>Input sampling cycle</b>	0.1 seconds	
	<b>ON detection min. hold time</b>	0.2 seconds (0.4 seconds for program No.)	
Indication/programmer	<b>Upper display</b>	Green 5-digit, 7-segment LED This displays PV values in the basic display state. Item codes are displayed in the parameter setup.	
	<b>Lower display</b>	Orange 5-digit, 7-segment LED This displays SP and output % in the basic display state. Setting values are displayed in the parameter setup.	
	<b>Program No. display</b>	Green 2-digit, 7-segment LED This displays program No. in the basic display state.	
	<b>Segment No. display</b>	Green 2-digit, 7-segment LED This displays segment No. in the basic display state. Item Nos. are displayed in parameter setup, and alarm No. is displayed when alarm occurs.	
	<b>Message display</b>	This displays output graph, deviation graph, event state and tags in the basic display state. This displays reference messages in the parameter setup and program setup. This displays operation details and operation results of memory card operation.	
	<b>Profile display</b>	7 orange LEDs Displays program pattern rise, soak and fall trends.	
	<b>Status displays</b>	22 round LEDs Modes: RUN, HLD, MAN, PRG (green) Display details: PV, SP, OUT, TM, CYC, SYN, DEV (green), EG1, EG2 (red) Battery voltage: BAT (red) (blinks at low voltage) Status: AT (green)	
	<b>Operation keys</b>	18 rubber keys	
	<b>Loader connector port</b>	1 (dedicated cable with stereo miniplugs)	
Modes	<b>Program operation modes</b>	READY: Ready to run program (control stop/program No. selectable)	
		RUN: Program run	
	<b>Constant-value operation modes</b>	HOLD: Program hold	
		FAST: Program fast-forward	
<b>Program operation modes</b>	END: Program end		
	READY FAST: Ready to run and fast-forward program		
<b>Constant-value operation modes</b>	AUTO: Automatic operation		
	MANUAL: Manual operation (output can be controlled on console)		
<b>Program operation modes</b>	READY: Ready to run program (control stop)		
	RUN: Program run		
<b>Constant-value operation modes</b>	AUTO: Automatic operation		
	MANUAL: Manual operation (output can be controlled on console)		
Controller	<b>PID controls</b>	<b>Proportional band (P)</b>	0.0 to 1000.0% (0.0: ON-OFF control)
		<b>Reset time (I)</b>	0 to 3600 seconds. 0 seconds: PD control
		<b>Rate time (D)</b>	0 to 1200 seconds. 0 seconds: PI control
		<b>MV limit</b>	Lower limit: -5.0 to upper limit % Upper limit: Lower limit to +105.0%
		<b>Manual reset</b>	0.0 to 100.0%

<b>Controller</b>	<b>PID controls</b>	<b>Number of PID sets</b>	16 sets for program operation (9 segment unique sets + 7 sets for automatic zone selection)
		<b>PID set selection</b>	Segment designation/automatic zone selection can be switched by program operation.
		<b>MV change</b>	0.1 to 110.0%/0.1 seconds
		<b>Auto-tuning</b>	Automatic setting of PID value by limit cycle system
		<b>ON-OFF control differential</b>	0 to 1000 U
	<b>Direct/reverse action switching</b>	Possible	
<b>Outputs</b>	<b>Auxiliary output</b>	<b>Output types</b>	SP1, PV1, deviation 1, MV1, SP2, PV2, deviation 2, O <sub>2</sub> sensor mV value
		<b>Scaling</b>	Possible
	<b>Current output (5G) CH1, CH2 auxiliary outputs CH1, CH2</b>	Output current:	4 to 20 mA dc
		Allowable load resistance:	600 Ω max. (under operating conditions)
<b>Voltage output (6D) CH1, CH2</b>	Output accuracy:	±0.1%FS max. (under standard conditions)	
	Output resolution:	1/10000	
<b>Open-collector output (8D) CH1, CH2</b>	Max. output current:	21.6 mA dc	
	Min. output current:	2.4 mA dc	
	Output updating cycle:	0.1 seconds	
	Open terminal voltage:	25 V max.	
	Allowable load resistance:	600 Ω max. (under operating conditions)	
	Load current adjustment:	2 to 22 mA variable	
	Variable open terminal voltage:	25 V max.	
	OFF leakage current:	100 μA max.	
	Output response time:	At ON-OFF 600 Ω load: 0.5 ms max. At OFF-ON 600 Ω load: 0.5 ms max.	
	Output resolution:	1/1000	
	Time-proportional cycle:	1 to 240 seconds variable	
	External supply voltage:	12 to 24V dc	
	Max. load current:	100 mA/load	
	OFF leakage current:	0.1 mA max.	
	ON residual voltage:	2 V max.	
	Output resolution:	1/1000	
	Time-proportional cycle:	1 to 240 seconds variable	
	<b>Open-collector output</b>	External supply voltage:	12 to 24V dc
Max. load current:		70 mA/load	
	Max. common current:	500 mA	
	OFF leakage current:	0.1 mA max.	
	ON residual voltage:	2 V max.	
	<b>Event types</b>	<b>PV type</b>	PV, deviation, w/ deviation standby, absolute value deviation, w/ absolute value deviation standby, PV rate-of-change, SP, MV, G.Soak absolute value deviation, w/ G.Soak absolute value deviation standby, PV1 constant operation, PV2 constant operation
<b>Time type</b>		Time events, RAMP-E time monitor, segment time, program time	
<b>Code type</b>		Code event, code event w/ timer, program No. binary code, segment No. binary code, program No. BCD code, segment No. BCD code	
<b>Mode type</b>		Unique segment, RUN+HOLD+END+FAST, HOLD, READY+READY FAST, END, G.Soak standby, MANUAL, AT executing, FAST+READY FAST, console operation in progress, RUN, advance, all alarms, PV range alarm, controller alarm, O <sub>2</sub> sensor error, low battery voltage	
	<b>Event hysteresis</b>	In case of PV type set, 0 to 1000 U	
	<b>Event ON delay</b>	0.0 to 3000.0 can be set to four events	
<b>Communications</b>	<b>RS-485</b>	<b>Network</b>	Multidrop This controller is provided with only slave instrument functionality except when connected to ST221 (dedicated display device). 1 to 16 units max. (DIM) 1 to 31 units max. (CMA, SCM)
		<b>Data flow</b>	Half duplex
		<b>Synchronization</b>	Start-stop synchronization
		<b>Transmission system</b>	Balanced (differential)
		<b>Data line</b>	Bit serial
		<b>Signal line</b>	5 transmit/receive lines (3-wire connection also possible)
		<b>Transmission speed</b>	1200, 2400, 4800, 9600 bps
		<b>Transmission distance</b>	500 m max. (total) (300 m max. for MA500 DIM connection)
	<b>Other</b>	Conforming to RS-485 interface specifications	

Communications	<b>RS-485</b>	<b>Char. bit count</b>	11 bits/character			
		<b>Format</b>	1 start bit, even parity, 1 stop bit; or 1 start bit, no parity, and 2 stop bits			
		<b>Data length</b>	8 bits			
		<b>Isolation</b>	All inputs and outputs are completely isolated except external switch inputs.			
	RS-485 communications can be performed by connecting to a computer equipped with an RS-485 interface or to Yamatake Corporation MX200, MA500 (DK link II DIM) or CMA50 controllers.					
	<b>RS-232C</b>	<b>Network</b>	1: 1 Connected, This controller is provided with only slave instrument functionality.			
		<b>Data flow</b>	Half duplex			
		<b>Synchronization</b>	Start-stop synchronization			
		<b>Transmission system</b>	Unbalanced type			
		<b>Data line</b>	Bit serial			
		<b>Signal line</b>	3 transmit/receive lines			
		<b>Transmission speed</b>	1200, 2400, 4800, 9600 bps			
		<b>Transmission distance</b>	15 m max.			
<b>Other</b>		Conforming to RS-232C interface specifications				
<b>Char. bit count</b>		11 bits/character				
<b>Format</b>		1 start bit, even parity, 1 stop bit; or 1 start bit, no parity, and 2 stop bits				
<b>Data length</b>		8 bits				
<b>Isolation</b>	All inputs and outputs are completely isolated except external switch inputs.					
Memory card	Program, PID, various parameters (SETUP, PARA, event) and other data can be saved and loaded to and from memory card (sold separately).					
	<b>Save (SAVE)</b>	Function for copying DCP552 data to memory card.				
	<b>Load (LOAD)</b>	Function for copying memory card data to DCP552.				
	Memory card (sold separately)					
	<b>Model No.</b>	<b>Memory Type</b>	<b>Size (bytes)</b>	<b>Number of Programs</b>	<b>Battery Replacement</b>	<b>Parameters</b>
	<b>SKM008A</b>	RAM	7.00 K	Max. 10	Not possible	Setup data
	<b>SKM016A</b>	RAM	14.50 K	Max. 26	Not possible	Variable parameters
	<b>SKM064A</b>	RAM	61.75 K	Max. 49	Not possible	PID parameters
	<b>SKM256C</b>	RAM	251 K	Max. 49	Possible	Event configuration data
	<b>SKM008E</b>	EEPROM	7.00 K	Max. 10	Battery not required	Constant-value operation data
<b>SKM032E</b>	EEPROM	29.75 K	Max. 49	Battery not required	data	
<ul style="list-style-type: none"> <li>Number of bytes per program is 26 + (5 x number of segments) + (5 x number of sub-functions).</li> <li>Number of bytes per parameter <ul style="list-style-type: none"> <li>Setup data: 217 bytes (17 + 2 x 100)</li> <li>Variable parameters: 257 bytes (17 + 2 x 120)</li> <li>PID parameters + constant-value operation data: 565 bytes (17 + 2 x 2 x 8 x 16 + 2 x 2 x 9)</li> <li>Event configuration data: 209 bytes (17 + 2 x 3 x 32)</li> </ul> </li> </ul>						
General specifications	<b>Memory backup</b>	Memory	Battery backed up RAM			
		Battery life	Controller power OFF: Approx. 5 years under standard conditions			
			Controller power ON: Approx. 10 years under standard conditions			
	<b>Rated power voltage</b>	100 to 240V ac, 50/60 Hz				
	<b>Power consumption</b>	25 VA max.				
	<b>Power ON rush current</b>	50 A max.				
	<b>Power ON operation</b>	Reset time: 10 seconds max. (time until normal operation is possible under normal operating conditions)				
	<b>Allowable transient power loss</b>	20 ms max. (under operating conditions)				
	<b>Insulation resistance</b>	Min. 50 MΩ across power terminal ③ <sup>9</sup> or ④ <sup>0</sup> and FG terminal ⑤ <sup>2</sup> or ⑤ <sup>3</sup> (by 500V dc megger)				
	<b>Dielectric strength</b>	1500V ac 50/60 Hz for 1 minute between power terminal and FG terminal Note) The primary side and secondary side capacities are joined inside the product. For this reason, when carrying out a withstand voltage test, disconnect the wiring of the grounded secondary side terminals (e.g. when grounding type thermocouple is used) from that terminal. If the test is carried out with the wiring as it is, this might result in malfunction.				
<b>Standard conditions</b>	<b>Ambient temperature</b>	23±2°C				
	<b>Ambient humidity</b>	60±5%RH				
	<b>Rated power voltage</b>	105V ac±1%				
	<b>Power frequency</b>	50±1 Hz, or 60±1 Hz				
	<b>Vibration resistance</b>	0 m/s <sup>2</sup>				
	<b>Shock resistance</b>	0 m/s <sup>2</sup>				
	<b>Mounting angle</b>	Reference plane (vertical) ±3°				

<b>General specifications</b>	<b>Operating conditions</b>	<b>Ambient temperature range</b>	0 to 50°C (ambient temperature at the bottom side of case when gang-mounted)				
		<b>Ambient humidity range</b>	10 to 90%RH (condensation not allowed)				
		<b>Rated power voltage</b>	100 to 240V ac				
		<b>Allowable power voltage</b>	90 to 264V ac				
		<b>Power frequency</b>	50±2 Hz, or 60±2 Hz				
		<b>Vibration resistance</b>	0 to 1.96 m/s <sup>2</sup>				
		<b>Shock resistance</b>	0 to 9.80 m/s <sup>2</sup>				
		<b>Mounting angle</b>	Reference plane (vertical) ±10°				
	<b>Transport/storage conditions</b>	<b>Ambient temperature range</b>	-20 to +70°C				
		<b>Ambient humidity range</b>	10 to 95%RH (condensation not allowed)				
		<b>Vibration resistance</b>	0 to 4.90 m/s <sup>2</sup> (10 to 60 Hz for 2 hours each in X, Y and Z directions)				
		<b>Shock resistance</b>	0 to 490 m/s <sup>2</sup> (3 times vertically)				
		<b>Package drop test</b>	Drop height: 60 cm (1 angle, 3 edges and 6 planes; free fall)				
<b>Terminal screw</b>	M3.5 self-tapping screws						
<b>Terminal screw tightening torque</b>	0.78 to 0.98 N·m						
<b>Mask/case materials</b>	Mask: Multilon	Case: Multilon					
<b>Mask/case color</b>	Mask: Dark gray (Munsell 5Y3.5/1)	Case: Light gray (Munsell 2.5Y7.5/1)					
<b>Installation</b>	Specially designed mounting bracket						
<b>Weight</b>	Approx. 1.5 kg						
<b>Standard accessories</b>	<b>Item</b>	<b>Model No.</b>	<b>Q'ty</b>	<b>Auxiliary parts (sold separately)</b>	<b>Item</b>	<b>Model No.</b>	<b>Q'ty</b>
	<b>Unit indicating label</b>	—	1		<b>Soft dust-proof cover set</b>	81446141-001	—
	<b>Mounting bracket</b>	81446044-001	1 set (2 p'ces)		<b>Lithium battery set</b>	81446140-001	Approx. 200 g
	<b>User's Manual</b>	CP-UM-5017E	1		<b>Memory card (RAM, battery replacement not possible)</b>	SKM008A SKM016A SKM064A	Approx. 30 g
	<b>Terminal cover</b>	81446176-001	1		<b>Memory card (RAM, battery replacement possible)</b>	SKM256C	
					<b>Memory card (EEPROM, battery not required)</b>	SKM008E SKM032E	

**Table 1 Input Types and Ranges (selectable in setup)**

● **Thermocouple**

Input Type			Input Range (FS)		Accuracy (under standard conditions)	
Symbol	Code	Range No.	°C	°F		
K (CA)	K46	16	-200.0 to +200.0	-300.0 to +400.0	±0.1%FS	
K (CA)	K09	0	0.0 to 1200.0	0 to 2400	±0.1%FS	
K (CA)	K08	1	0.0 to 800.0	0 to 1600	±0.1%FS	
K (CA)	K04	2	0.0 to 400.0	0 to 750	±0.1%FS	
E (CRC)	E08	3	0.0 to 800.0	0 to 1800	±0.1%FS	
J (IC)	J08	4	0.0 to 800.0	0.0 to 1600	±0.1%FS	
T (CC)	T44	5	-200.0 to +300.0	-300 to +700	±0.1%FS	±0.3%FS between -200°C to -45°C
B (PR30-6)	B18	6	0.0 to 1800.0	0 to 3300	±0.1%FS	±4.0%FS between 0 to 260°C, ±0.15%FS between 260 to 800°C
R (PR13)	R16	7	0.0 to 1600.0	0 to 3100	±0.1%FS	
S (PR10)	S16	8	0.0 to 1600.0	0 to 3100	±0.1%FS	
W (WRe5-26)	W23	9	0.0 to 2300.0	0 to 4200	±0.1%FS	
W (WRe5-26)	W14	10	0.0 to 1400.0	0 to 2552	±0.1%FS	
PR40-20	D19	11	0.0 to 1900.0	0 to 3400	±0.2%FS	±0.9%FS between 0 to 300°C, ±0.5%FS between 300 to 800°C
N	U13	12	0.0 to 1300.0	32 to 2372	±0.1%FS	
PLII	Y13	13	0.0 to 1300.0	32 to 2372	±0.1%FS	
Ni-Ni-Mo	Z13	14	0.0 to 1300.0	32 to 2372	±0.1%FS	
Golden iron chromel	Z06	15	0.0 to 300.0 K (K: Kelvin)		±0.4%FS	

● Resistance temperature detector (RTD)

Input Type			Input Range (FS)		Accuracy (under standard conditions)	
Symbol	Code	Range No.	°C	°F		
JIS'89Pt100 (IEC Pt100 Ω)	F50	64	-200.0 to +500.0	-300.0 to +900.0	±0.1%FS	
	F46	65	-200.0 to +200.0	-300.0 to +400.0	±0.1%FS	
	F32	66	-100.0 to +150.0	-150.0 to +300.0	±0.1%FS	
	F36	67	-50.0 to +200.0	-50.0 to +400.0	±0.1%FS	
	F33	68	-40.0 to +60.0	-40.0 to +140.0	±0.15%FS	
	F01	69	0.0 to 100.0	0.0 to 200.0	±0.15%FS	
	F03	70	0.0 to 300.0	0.0 to 500.0	±0.1%FS	
	F05	71	0.0 to 500.0	0.0 to 900.0	±0.1%FS	
JIS'89JPt100	P50	96	-200.0 to +500.0	-300.0 to +900.0	±0.1%FS	
	P46	97	-200.0 to +200.0	-300.0 to +400.0	±0.1%FS	
	P32	98	-100.0 to +150.0	-150.0 to +300.0	±0.1%FS	
	P36	99	-50.0 to +200.0	-50.0 to +400.0	±0.1%FS	
	P33	100	-40.0 to +60.0	-40.0 to +140.0	±0.15%FS	
	P01	101	0.0 to 100.0	0.0 to 200.0	±0.15%FS	
	P03	102	0.0 to 300.0	0.0 to 500.0	±0.1%FS	
	P05	103	0.0 to 500.0	0.0 to 900.0	±0.1%FS	

● DC current, DC voltage

Input Type			Input Range (FS)		Accuracy (under standard conditions)	
Symbol	Code	Range No.				
mA (linear)	C01	48	4 to 20 mA	Programmable range -19999 to +20000 (decimal point position can be changed)	±0.1%FS	
	Z51	52	2.4 to 20 mA		±0.1%FS	
mV (linear)	M01	49	0 to 10 mV	(decimal point position can be changed)	±0.1%FS	
	L02	50	-10 to +10 mV		±0.1%FS	
	—	51	0 to 100 mV		±0.15%FS	
mA (linear)	C01	128	4 to 20 mA	Programmable range -19999 to +20000 (decimal point position can be changed)	±0.15%FS	
	Z51	134	2.4 to 20 mA		±0.1%FS	
V (linear)	—	129	0 to 1 V	(decimal point position can be changed)	±0.1%FS	
	—	130	-1 to +1 V		±0.1%FS	
	V01	131	1 to 5 V		±0.1%FS	
	—	132	0 to 5 V		±0.1%FS	
	—	133	0 to 10 V		±0.1%FS	
O <sub>2</sub> sensor*	—	135	0 to 1250 mV Carbon potential (CP value) indication range: 0.000 to 4.000%C (Note that PID control is calculated in input range 0.000 to 2.000%C.) O <sub>2</sub> partial pressure (PO <sub>2</sub> ) indication range: 0.000 to 1.500 x 10 <sup>-20</sup> atm		±0.1%FS	When converted to mV value

- \* Any O<sub>2</sub> sensor made by Japan Glass Co., Ltd., Marathon Monitors, Cambridge, Corning, AACC (Advanced Atmosphere Control Corporation), Barber Colman and Furnace Control can be used.
- PV2 is fixed for the O<sub>2</sub> sensor in the case of models supporting carbon potential.

! Handling Precautions

- The unit of code Z06 is Kelvin (K).
- The PV lower limit alarm does not occur with codes F50 and P50.
- The number of digits past the decimal point for DC current and DC voltage is programmable within the range 0 to 4.
- The PV upper limit alarm is output by the O<sub>2</sub> sensor when the voltage exceeds 1375 mV. The PV lower limit alarm, however, is not output.


## MODEL SELECTION GUIDE

I II III IV V VI Example: DCP552A2010

I Basic Model No.	II —	III Number of PV inputs	IV Carbon Potential	V Option	VI Additions	Specifications	
DCP552	A	2	0	0		Digital Programmable Controller (2-loop model)	
						Mark II	
				0			PV input CH2
				1			None
					0		Available
					1		None
					2		Auxiliary output CH1
						00	Auxiliary output CH2, communications
						D0	None
							Inspection Certificate


## EXTERNAL DIMENSIONS


(Unit: mm)

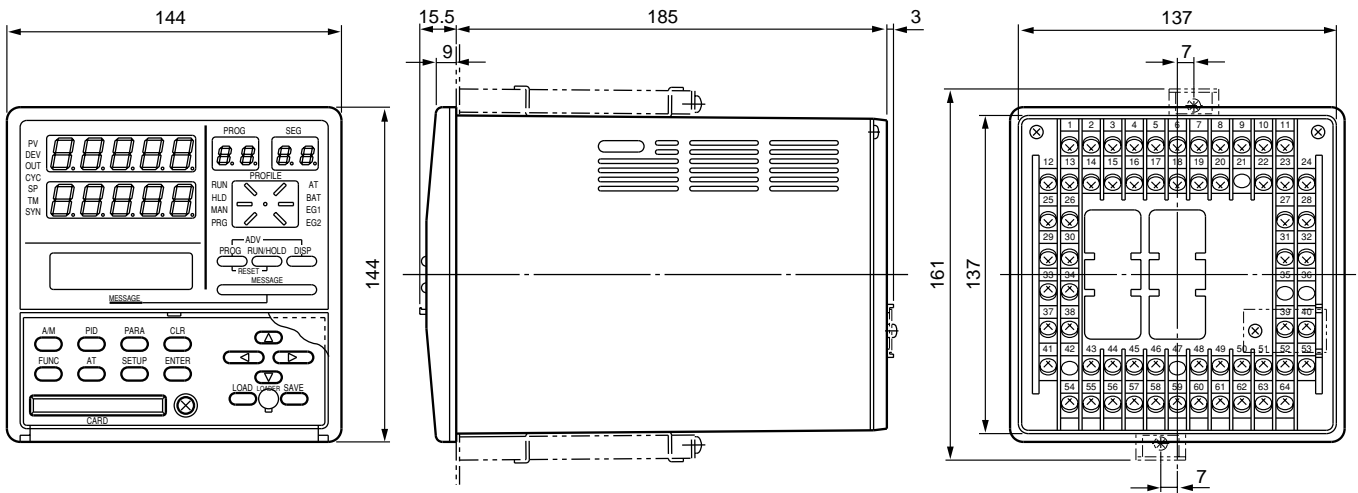


## PANEL CUTOUT

(Unit: mm)



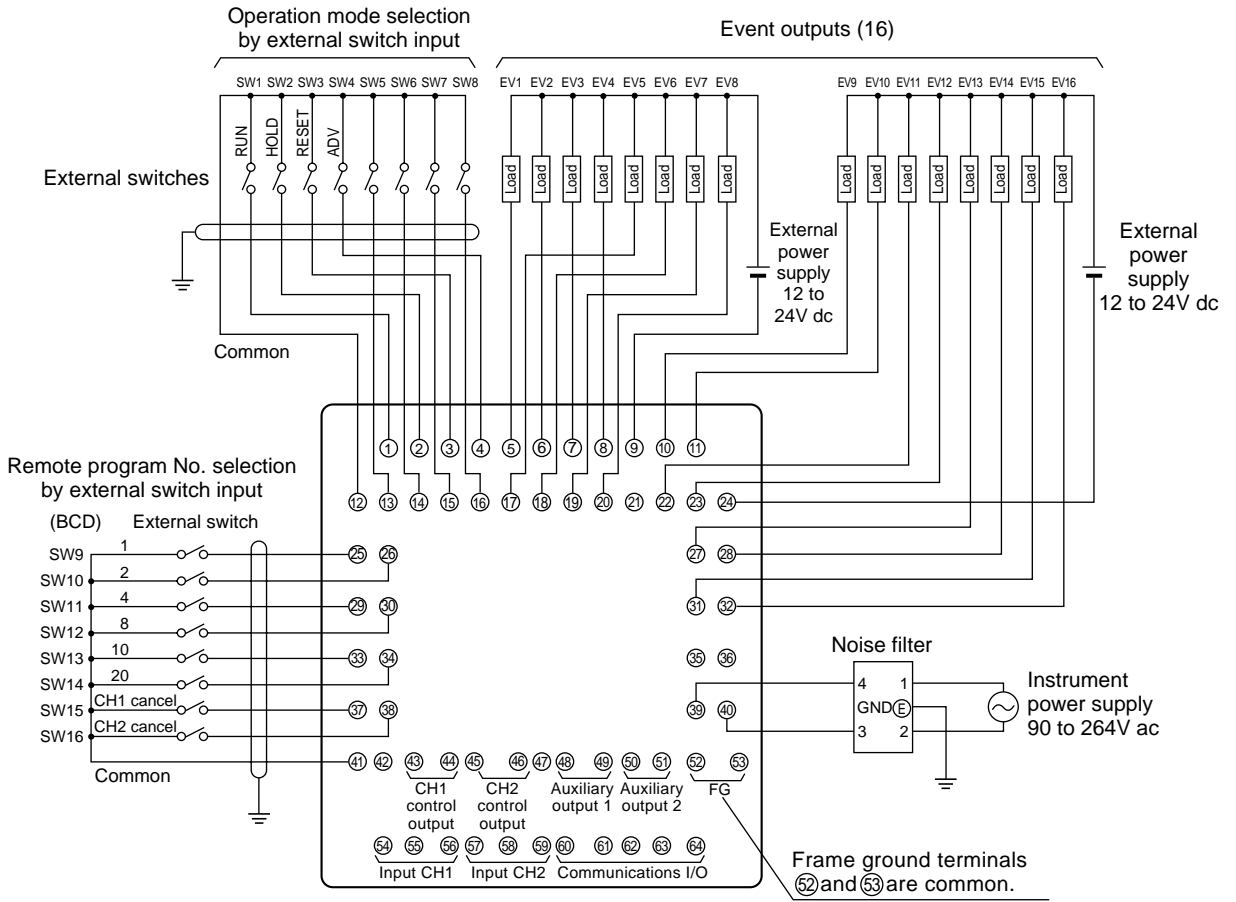


Input

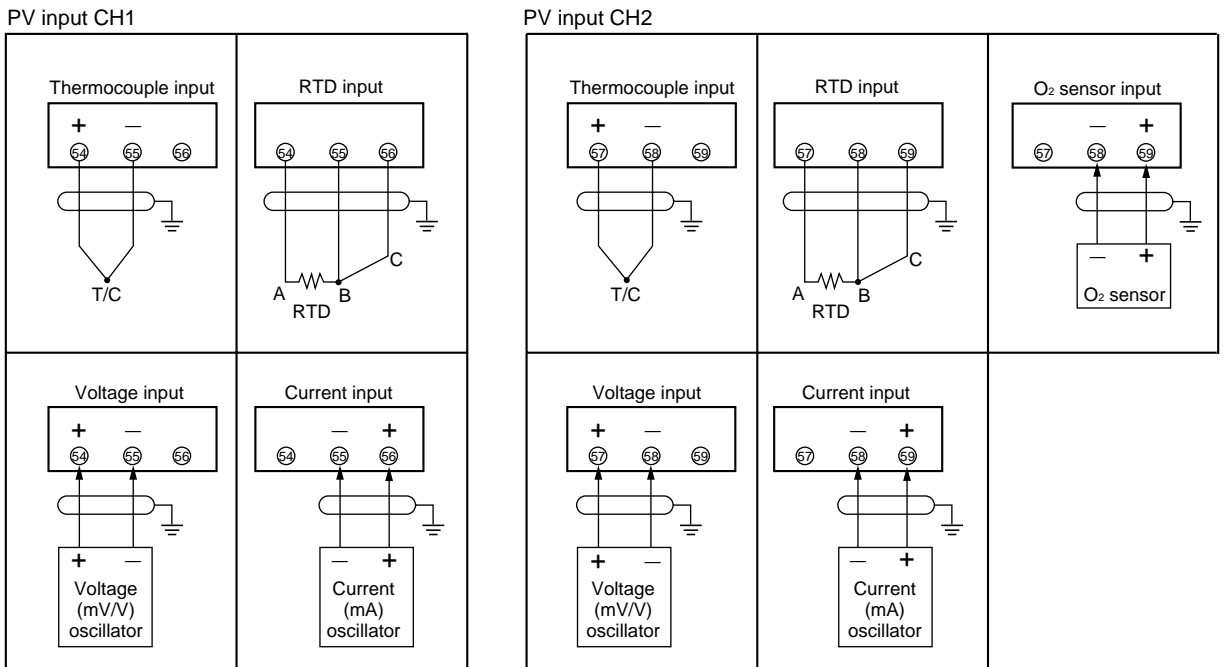


Note: If voltage mode signals are input to PV input CH1 (terminal Nos. 55, 56) and input CH2 (terminal Nos. 58, 59) for current input by mistake, a large current might flow and cause the controller to malfunction. Before wiring to the current input terminals on the **DCP552**, make sure that current input signals are output correctly within the range 4 to 20 mA.

## CONTROL OUTPUT AND AUXILIARY OUTPUT


### Control output

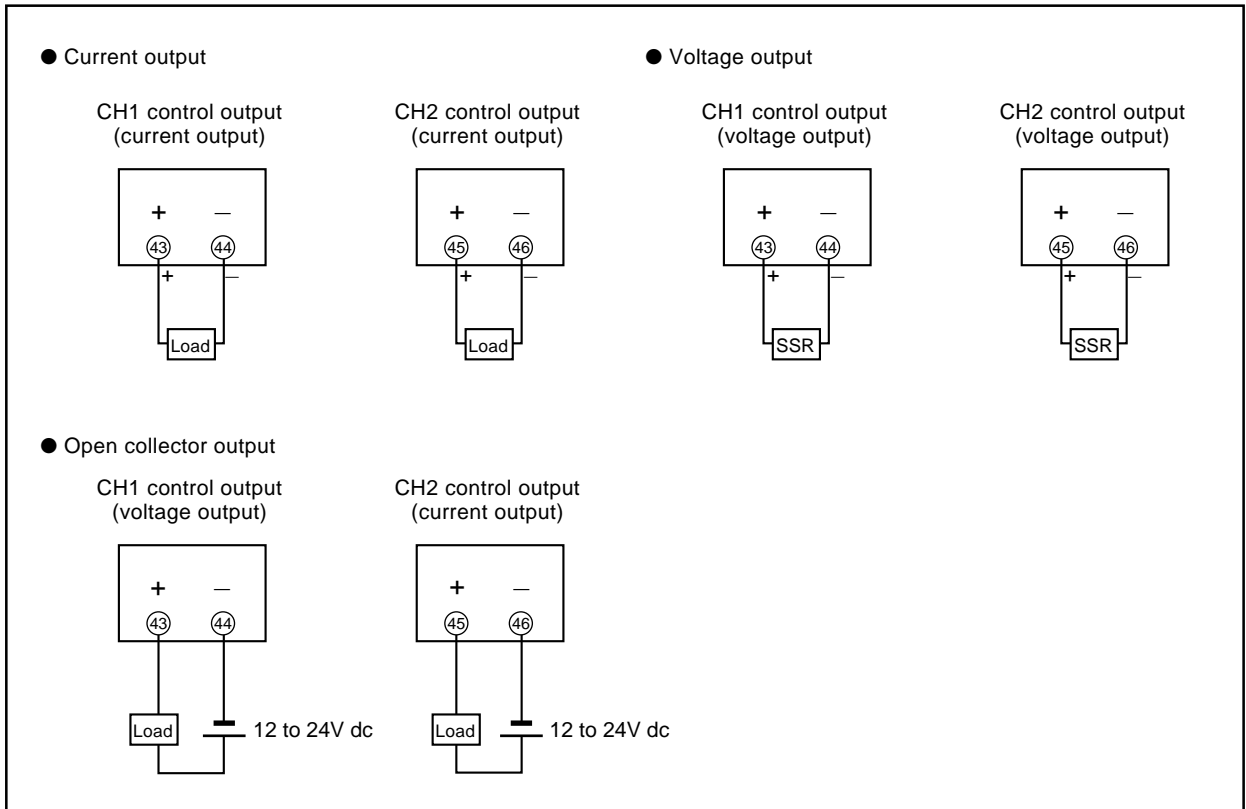


### Auxiliary output

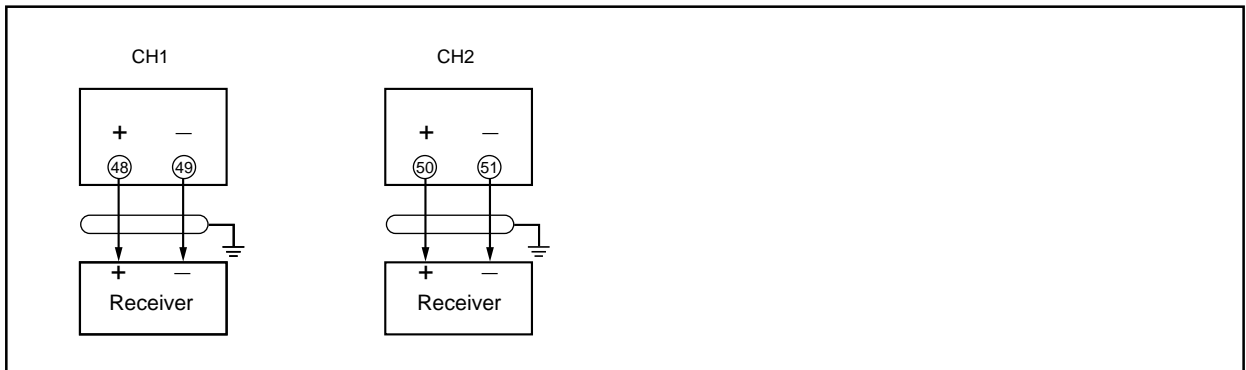

## INTERNAL CIRCUIT OF EXTERNAL SWITCH INPUT

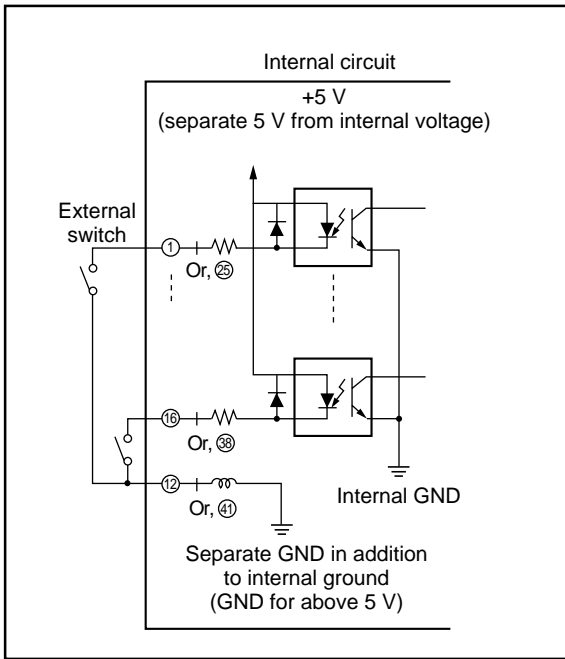

## COMMUNICATIONS I/O (OPTION)

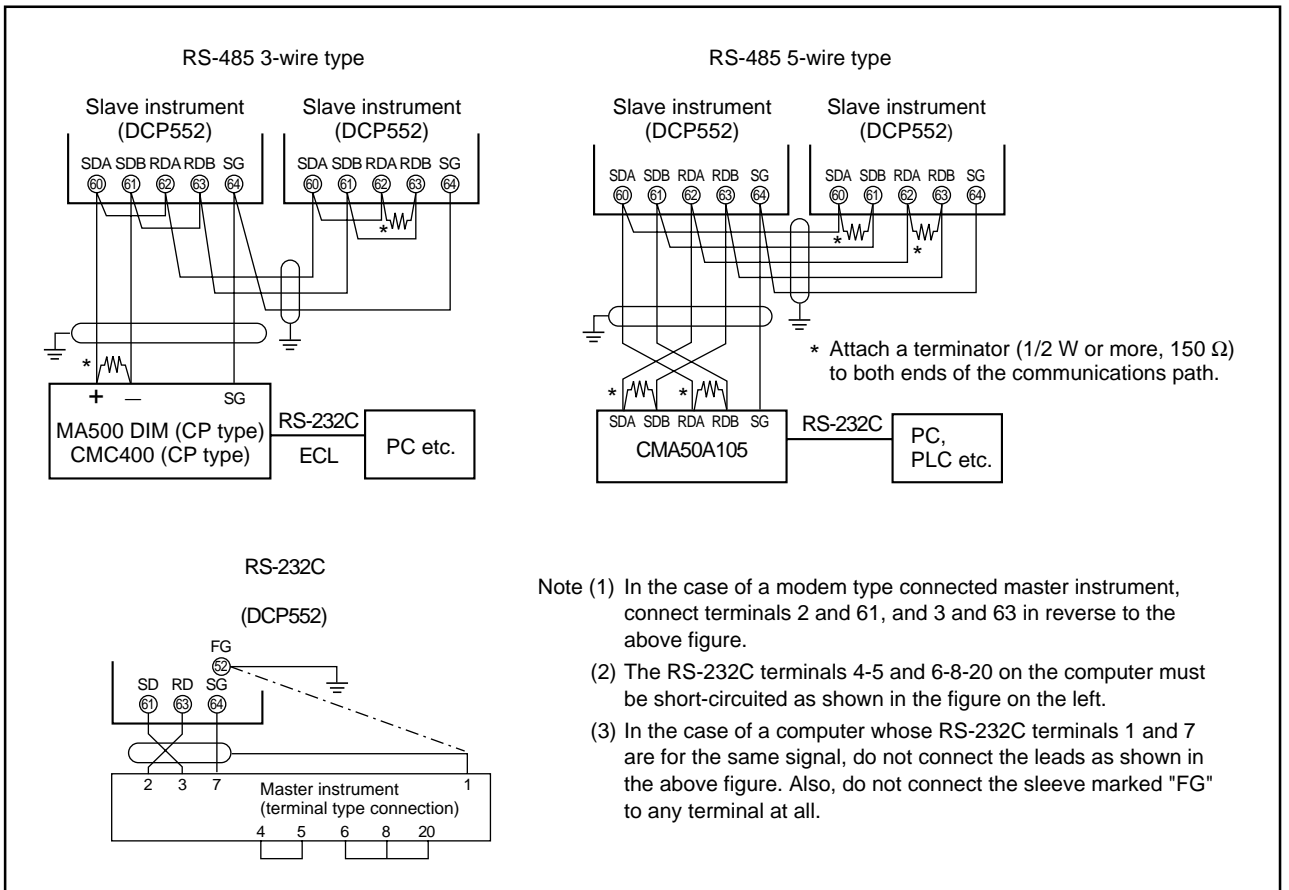

- Note (1) In the case of a modem type connected master instrument, connect terminals 2 and 61, and 3 and 63 in reverse to the above figure.
- (2) The RS-232C terminals 4-5 and 6-8-20 on the computer must be short-circuited as shown in the figure on the left.
- (3) In the case of a computer whose RS-232C terminals 1 and 7 are for the same signal, do not connect the leads as shown in the above figure. Also, do not connect the sleeve marked "FG" to any terminal at all.

## WIRING PRECAUTIONS

### 1. Isolating Inputs and Outputs inside the Controller

Solid lines — show isolated items.


Dotted lines - - - - show non-isolated items.

PV input CH1	Digital circuit	Control output CH1
PV input CH2		Auxiliary output CH1
Loader communications		Control output CH2
External switch input		Auxiliary output CH2
Communications		Event output
Memory card input		

### 2. Noise Countermeasures for Instrument Power Supplies


#### (1) Reducing noise

Connect the DCP552 to a single-phase power supply for instruments, and take measures to prevent the influence of electrical noise.

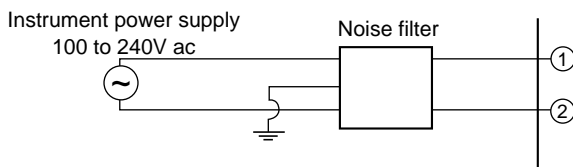

#### (2) When there is a lot of noise

If there is a lot of electrical noise, we recommend inserting an insulating transformer in the power circuit and using a line filter.

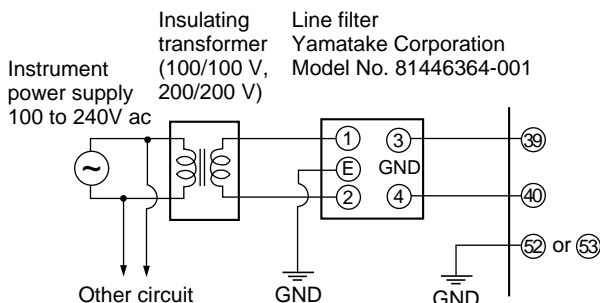

### 3. Noise Generating Sources and Countermeasures

Generally, the following generate electrical noise:

Relays and contacts, electromagnetic coils, solenoid valves, power lines (in particular, 90V ac min.), induction loads, inverters, motor commutators, phase angle control SCR, radio communications equipment, welding equipment, high-voltage ignition equipment

#### (1) Fast-rising noise

CR filters are effective in countering fast-rising noise.

Recommended CR filter:

Yamatake Corporation Model No.  
81446365-001

#### (2) Noise with a high wave height

Varistors are effective in countering noise with a high wave height. However, note that the varistor may become short-circuited when trouble occurs. Pay attention to this when providing a varistor on a controller.


Recommended varister:

Yamatake Corporation Model No.  
81446366-001 (for 100V ac)  
81446367-001 (for 200V ac)

### 4. Ground

Use only the FG terminal ⑤② or ⑤③ on the DCP552 for grounding. Do not ground across other terminals. When it is difficult to ground shielded cable, prepare a separate GND terminal plate (earth bar).

Ground type: 100 Ω max.  
Ground cable: 2 mm<sup>2</sup> min. annealed-copper wire (AWG14)  
Cable length: Max. 20 m

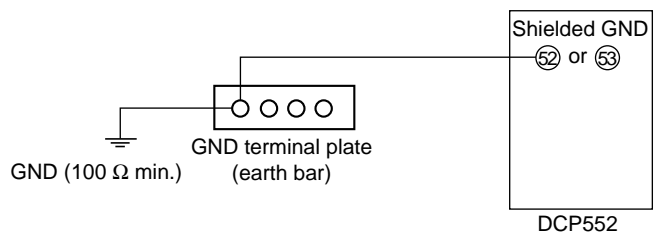

### 5. Precautions during Wiring

- (1) **After providing anti-noise measures**, do not bundle primary and secondary power leads together, or pass them through the same piping or wiring duct.
- (2) Maintain a distance of at least 50 cm between **I/O signal leads or communications leads** and the power lead. Also, do not pass these leads through the same piping or wiring duct.

### 6. Inspection after Wiring

After wiring is completed, be sure to inspect and check the wiring state. Wrong wiring may cause controller malfunction or accidents.

Specifications are subject to change without notice.

## Yamatake Corporation

IBD Sensing and Control Department  
Totate International Building  
2-12-19 Shibuya Shibuya-ku Tokyo 150-8316 Japan  
Phone: 81-3-3486-2311  
Fax: 81-3-3486-2300

**YAMATAKE**  
Savemation

Printed in Japan. (H)  
1st Edition: Issued in June, 1998