


# QN206/212

## Current Transformers

The QN206/212 are current transformers used with DigitroniK temperature controllers, to monitor load current.

These transformers initiate an alarm signal on partial failure of parallel-connected heating elements, and on total failure of series elements.

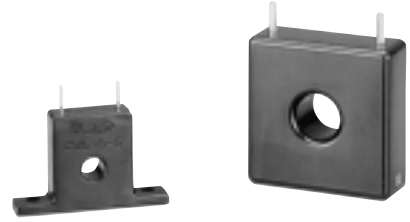

CONTROLLERS

### Specifications

	QN206A	QN212A
Thru current	0 to 50A (r.m.s.) 50/60Hz	0 to 200A (r.m.s.) 50/60Hz
Internal resistance	39 ± 3W	27 ± 3W
Ambient temperature	-10 to + 75°C	-20 to + 75°C
Weight	Approx. 10.5g	Approx. 55g

### Selection Guide

Model No.	Description
QN206A	Current transformer 0 to 50A (r.m.s.) 50/60Hz
QN212A	Current transformer 0 to 200A (r.m.s.) 50/60Hz

### Dimensions (unit:mm)

