


C6065

Differential Pressure Switch

The C6065 functions as a combustion airflow supervisor, with a safe start interlock, suitable for positive or negative pressure applications.

This switch can be used with air or any normal product of gas combustion.

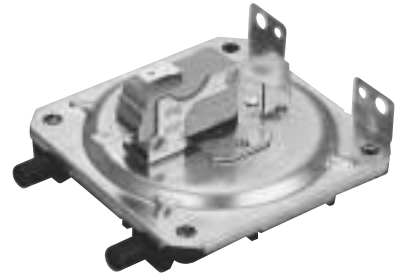

Specifications

Switch action	SPDT, N.O. contact closes on differential pressure rise to ON point
Max. operating pressure	590Pa
Ambient temperature	-10 to +70°C
Ambient humidity	90%RH at 40°C (no condensation allowed)
Electric rating	250Vac, 1.5A (resistive load)
Mounting	Vertical
Control medium	Air
Life	200,000 cycles
Cover material	Zinc coated steel plate
Housing material	Polyethylene phthalate
Pressure connection port	6.4mm dia. hose end
Electrical connection	#250 Faston male quick connect terminal
Weight	80g

Dimensions

(unit:mm)

