

ST3000 Ace Smart Transmitter

JTH Series of Remote-sealed Type Pressure Transmitters

JTH920A/JTH940A/JTH960A

General

The ST3000 Ace* Smart Transmitter is a microprocessor-based smart transmitter that features high performance and excellent stability. Capable of measuring gas, liquid, and vapor pressures, and liquid levels, it transmits 4 to 20 mA dc analog and digital signals according to the measured pressure.

It can also execute two-way communications between the SFC (Smart Field Communicator), and, via DE protocol, with the TDCS3000 or 3000^x and a database, thus facilitating self-diagnosis, range resetting, and automatic zero adjustment.

Remote-sealed pressure transmitters are suitable for the measurement of pressures (pressures, liquid levels, etc.) of process fluids that are highly corrosive, tend to condense, precipitate metal, etc.



Features

- (1) Excellent stability and high performance
 - Long-term stability is proven in 500,000 installations worldwide.
 - Unique characterization and composite semiconductor sensors realize excellent temperature and static pressure characteristics.
- (2) A diverse lineup
 - A diverse flange lineup, ranging from small diameter 1.5B (40A) and 2B (50A) to 3B (80A), is available to meet user requirements.
 - A wide range of models, including those for general purposes and high-temperature service, is available to meet user requirements. In addition, the working temperature range of general purpose models has been expanded to 180°C maximum to allow you greater freedom in instrumentation.
 - A wide variety of corrosion-resistant materials for wetted parts is also available.
- (3) Multiprotocol communication
 - Either analog output (4 to 20 mA dc), analog FSK output (4 to 20 mA dc) or digital output (DE protocol) is possible.
 - Two-way communication using digital output facilitates self-diagnosis, range resetting, automatic zero adjustment, and other operations.

- (4) Full after-sales service program

- From product delivery to replacement, we service all your needs. Our nationwide service network provides all the backup you require, including trial operation support and regular maintenance.

Applications

Petroleum/Petrochemical/Chemical

- For the measurement of liquid levels including corrosive fluids at high temperatures, and high temperatures under vacuum
- For the measurement of liquid levels in small tanks

Electric Power/City Gas/Other Utilities

- For measurement applications that require high degrees of stability and accuracy

Pulp and Paper

- For lines that need transmitters resistant to chemical liquids, corrosive fluids and the like
- For the measurement of liquid levels in small tanks

Iron and Steel/Nonferrous Metal/Ceramics

- For lines that require stable measurement under strictly controlled (temperature, humidity, etc.) conditions

Machinery/Shipbuilding

- For lines that require stable measurement under strictly controlled (temperature, humidity, vibration, etc.) conditions

Specifications

Measuring span/setting range/working pressure range/overload resistant value:

See Table 1.

Output/communication:

Analog output (4 to 20 mA DC)
 Analog FSK output (4 to 20 mA DC)
 (Frequency shift keying signal transmission system)
 Digital output (DE protocol)

Supply voltage and load resistance:

10.8 to 45 V DC. A load resistance of 250 Ω or more is necessary between loops. (See Figure 1)

Sealing liquid: Silicone oil for general purpose and high-temperature models

Fluorine oil for oxygen and chlorine models
 For specific gravity, see Table 2.

Temperature ranges of wetted parts:

See Table 2.

Ambient temperature ranges:

See Table 2, except for explosion-proof models with digital indicators, which have to be used within the following ranges:

Models with digital indicators:

Normal operating conditions: -20 to 70°C

Operative limits: -30 to 80°C

JIS pressure-resistant special explosion-proof models: -20 to 60°C

JIS intrinsically safe explosion-proof models: -10 to 60°C

Ambient humidity range:

5 to 100% RH

Stability against supply voltage change:

±0.005% FS/V

Lightning protection:

Peak value of voltage surge: 100 kV
 Peak value of current surge: 1000 A

Dead time:

Approx. 0.4 sec

Damping time constant:

Selectable from 0 to 32 sec in ten stages

Waterproof/dustproof structure:

JIS C0920 watertight: NEMA3 and 4X
 JIS F8001 class 2 watertight: IEC IP67

Explosion-proof structure:

JIS special explosion-proof models: (Exd II CT4X)
 JIS intrinsically safe models: (i3aG4)

	Measuring Span	Setting Range	Working Pressure Range	Overload Resistant Value
JTH920A	2.5~100kPa {250~10000mmH ₂ O}	-100~100kPa {-10000~10000mmH ₂ O}	Up to the flange rating	
JTH940A	35~3500kPa {0.35~35kgf/cm ² }	-100~3500kPa {-1~35kgf/cm ² }	Up to the smaller value of either setting range or flange rating (For negative pressures, see Figures 2, 3 and 4.) (For flange rating, see "Max Working Pressure")	5250kPa {52.5kgf/cm ² }
JTH960A	0.7~10MPa {7~102kgf/cm ² }	-0.1~10MPa {-1~102kgf/cm ² }		15.3MPa {153kgf/cm ² }
JTH980A	0.7~42MPa {7~428kgf/cm ² }	-0.1~42MPa {-1~428kgf/cm ² }		63MPa {630kgf/cm ² }

Note) The flange diameter of JTH920A applies only to the flush diaphragm flange 3in. (50mm) and the extended diaphragm flange 4in. (100mm).

Table 1 Measuring Span, Setting Range, and Working Pressure Range/Overload Resistant Value

		Temperature Range (°C) Note 1), Note 4)				
		General-purpose models	High-temperature models	High-temperature vacuum models	High-temperature high vacuum models	Oxygen and chlorine models
Wetted parts section	Normal operating range	-40~180	-5~280 Note 5)	-5~280 Note 5)	10~280 Note 5)	-10~120
	Operative limit range	-50~185	-10~310 Note 6)	-10~310 Note 6)	-10~310 Note 6)	-40~125
Ambient temperature Note 2) Flange diameter: Flush diaphragm 3in. (80mm) Extended diaphragm 4in. (100mm)	Normal operating range	-30~75	-5~55	-5~55	10~55	-10~75
	Operative limit range	-50~80	-10~60	-10~60	-10~60	-40~80
Ambient temperature Note 2) Flange diameter: Flush diaphragm 2in. (50mm) /1.5in. (40mm) Extended diaphragm 3in. (80mm) /2in. (50mm)	Normal operating range	-15~65	-5~45	-5~55	10~55	-10~75
	Operative limit range	-30~80	-10~55	-10~60	-10~60	-40~80
Specific gravity of fill liquid Note 3)		0.935	1.07	1.07	1.09	1.87

Table 2 Temperature Range of Wetted Parts Section and Ambient Temperature Range

Note 1) See the working pressures and temperatures of the wetted parts section in Figure 2, Figure 3, and Figure 4.
 Note 2) Ambient temperatures of the transmitter itself
 Note 3) Approximate values at the temperature of 25°C
 Note 4) Note that if the operating temperature falls below the lower limit of the normal operating range, the response of the transmitter becomes slower.
 Note 5) When the wetted parts material is tantalum, the upper limit is 180°C.
 Note 6) When the wetted parts material is tantalum, the upper limit is 200°C.



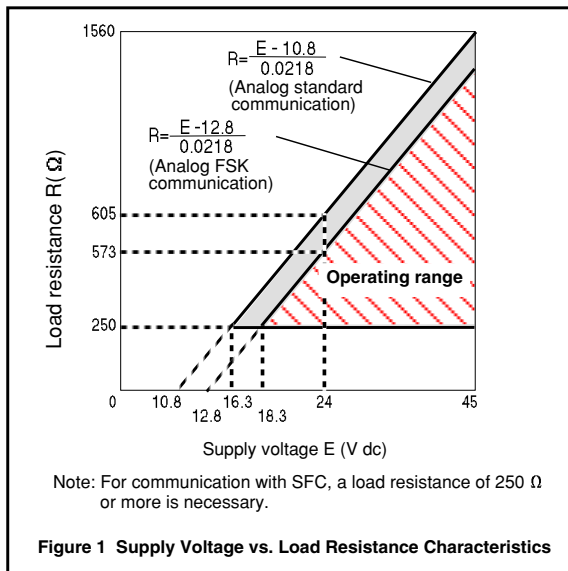



Figure 1 Supply Voltage vs. Load Resistance Characteristics

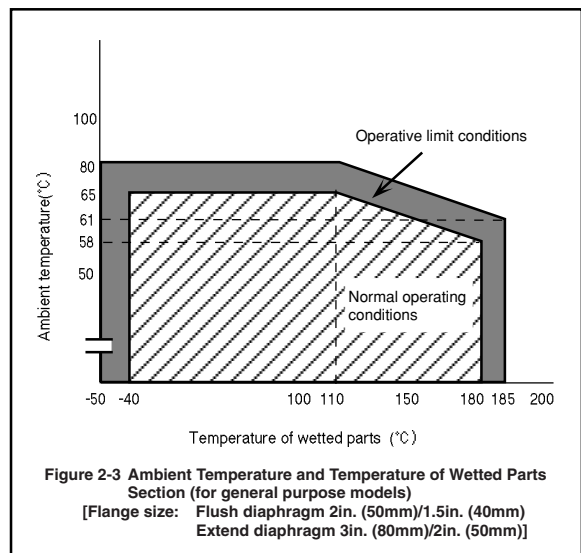



Note) When the fill liquid is for general purpose, make sure before using your transmitter that the conditions in both Figure 2-1,2-2 and Figure 2-3 are met.

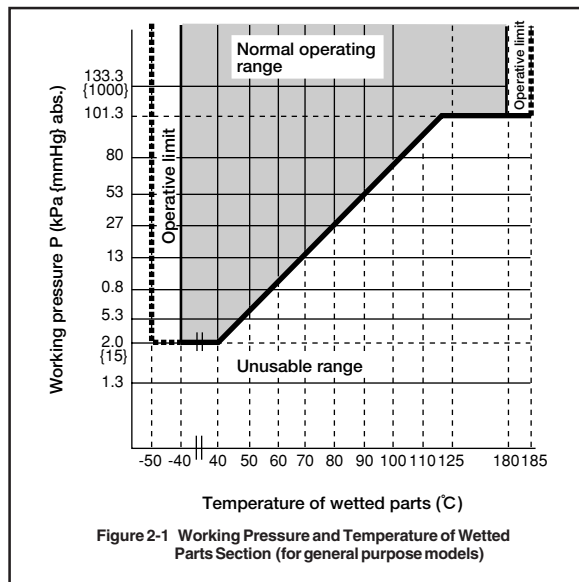

Note) In the case of dual diaphragm, the lower limit value of working pressure becomes 53 kPa.

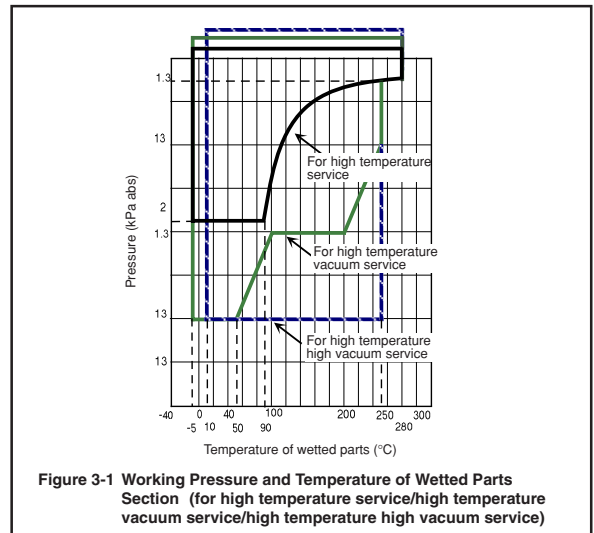

Note) When the fill liquid is for high temperature vacuum service/high temperature high vacuum service, make sure before using your transmitter that the condition in both figure 3-1, 3-2, 3-3, 3-4 and 3-5 are met.

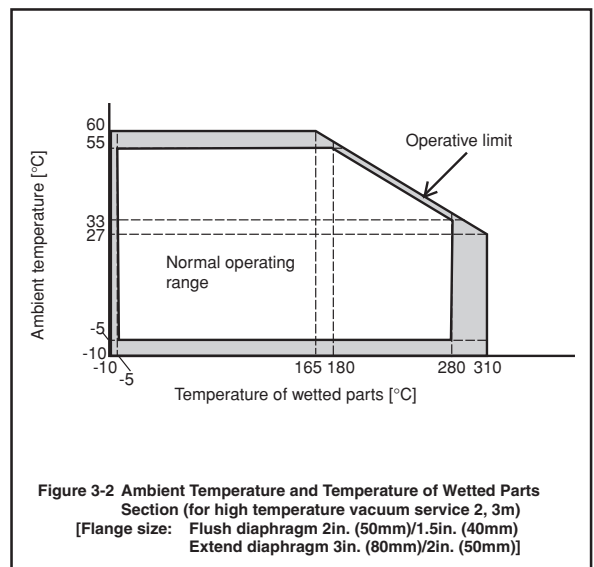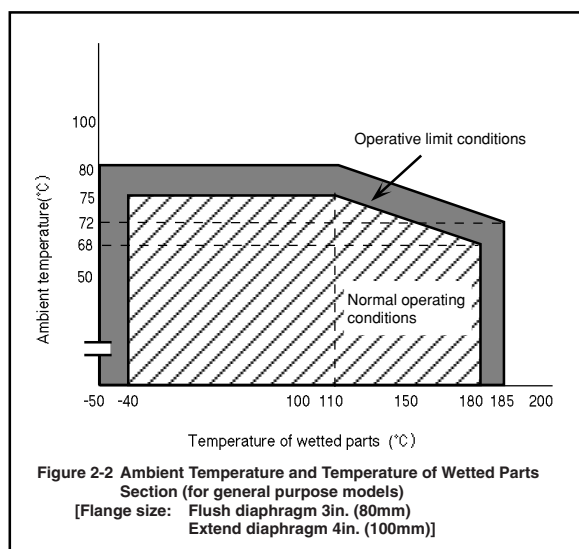

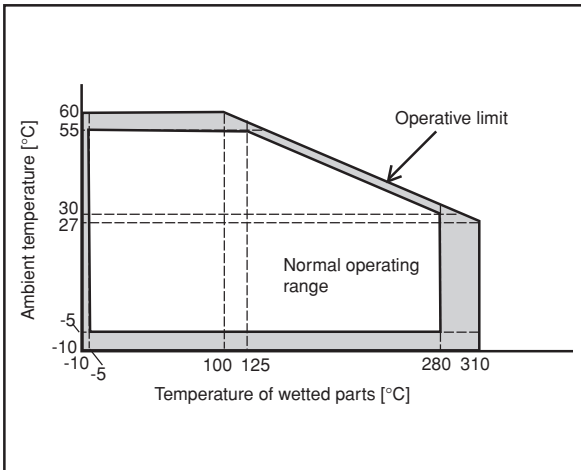


Figure 3-3 Ambient Temperature and Temperature of Wetted Parts Section (for high temperature vacuum service 4,5m)
 [Flange size: Flush diaphragm 2in. (50mm)/1.5in. (40mm)
 Extend diaphragm 3in. (80mm)/2in. (50mm)]

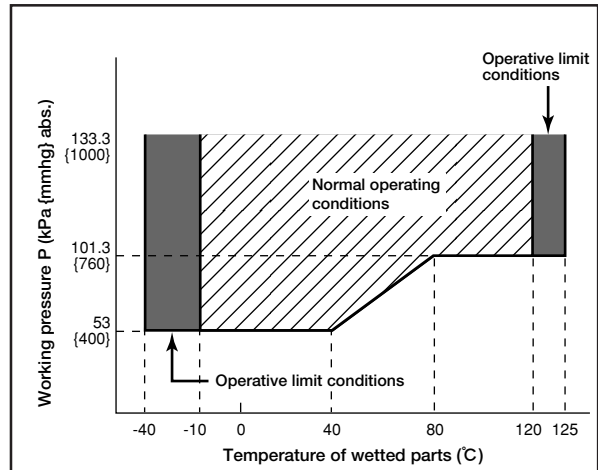


Figure 4 Working Pressure and Temperature of Wetted Parts Section (for oxygen and chlorine models)

Note) In the case of dual diaphragm, the lower limit value of working pressure becomes 53 kPa abs.

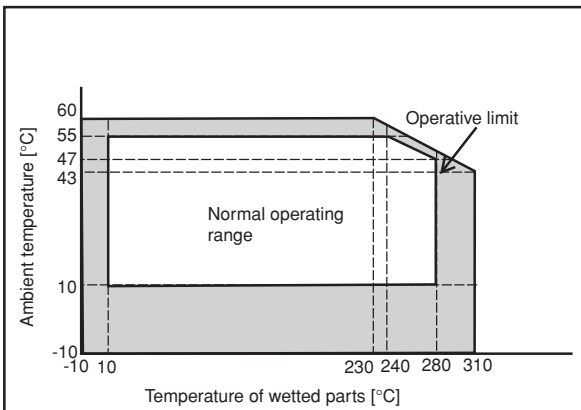


Figure 3-4 Ambient Temperature and Temperature of Wetted Parts Section (for high temperature high vacuum service 2,3m)
 [Flange size: Flush diaphragm 2in. (50mm)/1.5in. (40mm)
 Extend diaphragm 3in. (80mm)/2in. (50mm)]

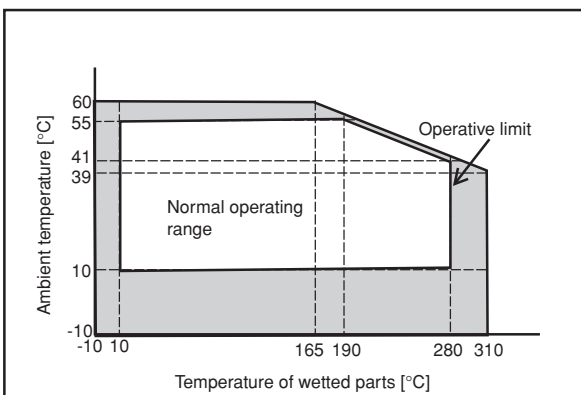


Figure 3-5 Ambient Temperature and Temperature of Wetted Parts Section (for high temperature vacuum service 4,5m)
 [Flange size: Flush diaphragm 2in. (50mm)/1.5in. (40mm)
 Extend diaphragm 3in. (80mm)/2in. (50mm)]

Max Working Pressure

- Note 1. Max Working Pressure depends on flange rating, flange materials and operating temperature. Please refer to the following data. Operating range of temperature depends on the specifications of transmitter.
- Note 2. In the case of flange type (JTF940□, JTC940□) and remote sealed type (JTU940□, JTH940□), Max Working Pressure depends on the smaller value of either 3.5MPa or following data.
- Note 3. In the case of absolute remote sealed type (JTS940□), Max Working Pressure depends on the smaller value of either 3.5MPa abs or following data. As for the following data, the vertical axis represent gauge pressure.
- Note 4. In the case of remote sealed type (JTH960□), Max Working Pressure depends on the smaller value of either 10MPa or following data.
- Note 5. In the case of 1/2in. remote sealed type (JTE929□, JTE930□, JTH960□), Max Working Pressure depends on the smaller value of either 5.1MPa or the following data as for adapter flange (HF).

	J I S	J P I / A N S I
Carbon steel		
SUS304		
SUS316		
SUS316L		

Process pipe connection:

- Flanges (both higher and lower pressure sides)
- Flush diaphragm:
 - JIS10K, 20K, 30K, and 63K-80mm/50mm/40mm (RF) equivalents
 - ANSI150, 300, and 600-3in./2in./1.5in. (RF) equivalents
 - JPI150, 300, and 600-3in./2in./1.5in. (RF) equivalents
- Extended diaphragm:
 - JIS10K, 20K, 30K-100mm/80mm/50mm/40mm (RF) equivalents
 - ANSI150 and 300-4in./3in./2in. (RF) equivalents
 - JPI150 and 300-4in./3in./2in. (RF) equivalents
- Screw connection:
 - G1/2 button diaphragm (G1/2 external thread)

Electrical conduit connection:

- G1/2 internal thread
- 1/2NPT internal thread (Not usable with JIS explosion-proof models)

Materials:

- Center body: SUS316
- Transmitter case: Aluminum alloy
- Meter body cover: SUSF304

Wetted parts materials:

- SUS316 (SUS316L for diaphragm only)
- SUS316L
- Hastelloy C, tantalum, etc.

Flange materials:

- Carbon steel (SF440A), SUS304, SUS316, SUS316L

Bolts and nuts materials (for fastening meter body cover):

- Carbon steel (SNB7), SUS630, SUS304

Capillary section:

- Capillary tube length: 2, 3, 4, 5, 6, 7, 8, 9, and 10 m
- 2, 3, 4, and 5 m when
- flange diameters:
 - flush diaphragm model 2in. (50mm)/1.5in. (40mm)
 - extended diaphragm model 3in. (80mm)/2in. (50mm) (Same for olefin covering)
- Capillary tube material: SUS316
- Armored tube material: SUS304
- Coating (optional): Olefin covering to improve corrosion resistance
(Not available for high-temperature vacuum or high-temperature high-vacuum models)

- Finish:** Housing: light beige (Munsell 4Y7.2/1.3)
Cap: dark beige (Munsell 10YR4.7/0.5)

Corrosion-resistant finish:

- Standard: Corrosion-resistant paint (Baked acrylic paint)
- Corrosion-resistant finish:
 - Corrosion-resistant paint (Baked acrylic paint), fungus-proof finish
- Corrosion-proof finish:
 - Corrosion-proof paint (Baked epoxy paint), fungus-proof finish
- Corrosion-resistant finish (silver paint):
 - Transmitter case is silver-coated in addition to the above corrosion-resistant finish.

Built-in indicating meter:

The digital LCD indicator (optional) indicates actual flow rates (in SI units) and can be set freely between -19999 and 19999 (4.5 digits). For actual calibration, specify the following items when placing your order:

- Actual calibration range
- Actual calibration unit
- Proportional representation and instructions about square-root extraction

Various kinds of data can be set using the SFC smart communicator (Ver. 7.1 or newer).

Burnout feature:

- Choice of three states at abnormal condition:
 - Burnout of output values: none
 - upper limit
 - lower limit

Grounding:


- Grounding resistance 100 Ω max.

Mounting:

- Direct mounting on the process side
- Using 2-inch pipe mounting brackets:
 - Mount the transmitter on a horizontal or vertical 2-inch pipe, then use the brackets.
 - Materials: Brackets: carbon steel
 - U bolts and nuts: SUS304

Weight:

- Approx. 13.3 kg
(including JIS10K-80mm flange and capillary 5 m long)

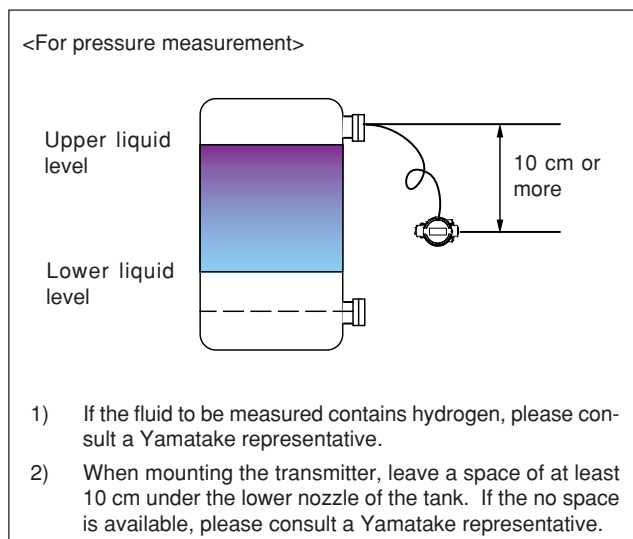Mounting Notes

Optional Specifications

External zero adjustment function:

The transmitter can be easily zero-adjusted in the field with a flat-head screwdriver.

Additional lightning protection:

It is possible to achieve a lightning protection performance of 200 kV, 2000 A, twice the standard performance (100 kV, 1000 A). This is advisable when the transmitter is to be used in lightning-prone areas such as mountains, hills and wherever high-performance lightning protection is required.

Elbow:

This is an adaptor for changing the electrical conduit connection port from the horizontal to the vertical direction, if required by wiring conditions in the field. One or two elbows may be used as needed.

Dual diaphragm:

Diaphragm can be changed when the adapter for dual diaphragm is used.

Water free treatment (including oil-free treatment):

The transmitter is shipped with dry and oil-free wetted parts.

Oil free treatment:

The transmitter is shipped with oil-free wetted parts. (The vent drain plug is coated with a small amount of fluorine oil to prevent galling.)

FEP protective film:

Use FEP protective films when corrosive fluids are used or to inhibit ion migration from metal diaphragms.

Working temperature range:

0 to 110°C

Working pressure range:

atmospheric pressure to flange rating

(up to JIS10K, ANSI/JPI150)

(Not usable under negative pressure)

Electric power specification:

This specification applies to where stringent quality control is required, such as in the electric power and city gas industries.

Special burnout (3.2 mA):

The burnout output value (in the lower-limit direction) under abnormal conditions shall be 3.2 mA (-5%) or less.

Test report:

The test report indicates the results of appearance, I/O characteristics, insulation resistance, and breakdown voltage tests.

Material certificate:

The material certificate shows the chemical composition, heat-treatment conditions, and mechanical properties of the materials used for the wetted parts.

Strength calculation sheet:

The strength calculation sheet indicates the strength of the meter body cover, flanges, bolts, etc.

Withstand pressure and airtight tests (for general purposes):

The withstand pressure and airtight test result sheet shows the results of a pressure resistance test (under water pressure for 10 minutes) performed on the wetted parts.

Traceability certificate:

This certificate consists of three parts: the transmitter's measurement control system configuration diagram, a calibration certificate, and a test report.

Conformance to non-SI units:

We deliver transmitters set to any non-SI unit you specify.

Transmitter Handling Notes

To get the most from the performance this transmitter can offer, please use it properly noting the points mentioned below. Before using it, please read the Instruction Manual.

Transmitter Installation Notes

Warning

- When installing the transmitter, ensure that gaskets do not protrude from connecting points into the process (such as adapter flange connection points and connecting pipes and flanges). Gasket protrusion may result in leaks and output errors.
- Do not use the transmitter outside its defined pressure, temperature, and connection specifications. A serious accident may otherwise occur due to damage and leaks.
- When performing wiring work in explosion-proof areas, follow the work method specified in the explosion-proof guidelines. In addition, when the wiring for an explosion-proof product is a pull-in pressure-resistant packing-cable, be sure to use a pressure-resistant packing-cable adapter certified by Yamatake Corporation.
- Be sure to use the cable which allowable temperature is more than 65°C.

Caution

- After installing the transmitter, do not step or stand on it. Using it as a foothold could cause it to collapse and cause physical injury.
- Be careful not to hit the glass indicator with tools etc. This could break the glass and cause injury.
- This transmitter is heavy. Wear safety shoes and take care when installing it.

Wiring Notes

Warning

- To avoid shocks, do not perform electrical wiring work with wet hands or with live wires.

Caution

- Do wiring work properly in conformance with the specifications. Wiring mistakes may result in malfunction or irreparable damage to the instrument.
- Use a power supply that conforms to the specifications. Use of an improper power supply may result in malfunction or irreparable damage to the instrument.

Performance

Shown for each item are the upper limit (URV) ⁽¹⁾ and the lower limit (LRV) ⁽²⁾ of the calibration range or the percentage ratio of the maximum value of the span to χ (kPa).

JTH920A (for general purpose and high-temperature models)

Material for Wetted Parts: SUS316

Flange diameter: Flush diaphragm 3in. (80mm) Extended diaphragm 4in. (100mm)

Accuracy ⁽³⁾	Linear output:	$\pm 0.3\%$ $\pm (0.3 \times \frac{12.5}{\chi}) \%$	$(\chi \geq 12.5\text{kPa } \{1250\text{mmH}_2\text{O}\})$ $(\chi < 12.5\text{kPa } \{1250\text{mmH}_2\text{O}\})$
Temperature characteristics (Shift from the set range)	Zero shift:	$\pm 1.25\%$ $\pm 1.25 \times \frac{25}{\chi} \%$	$(\chi \geq 25\text{kPa } \{2500\text{mmH}_2\text{O}\})$ $(\chi < 25\text{kPa } \{2500\text{mmH}_2\text{O}\})$
Change of 55°C ⁽³⁾	Combined shift:	$\pm 2.5\%$ $\pm 2.5 \times \frac{25}{\chi} \%$	$(\chi \geq 25\text{kPa } \{2500\text{mmH}_2\text{O}\})$ $(\chi < 25\text{kPa } \{2500\text{mmH}_2\text{O}\})$

JTH920A (for general purpose and high-temperature models)

Material for Wetted Parts: Hastelloy C, Tantalum

Flange Diameter: Flush diaphragm 3in. (80mm)

Accuracy ⁽³⁾	Linear output:	$\pm 0.4\%$ $\pm (0.4 \times \frac{12.5}{\chi}) \%$	$(\chi \geq 12.5\text{kPa } \{1250\text{mmH}_2\text{O}\})$ $(\chi < 12.5\text{kPa } \{1250\text{mmH}_2\text{O}\})$
Temperature characteristics (Shift from the set range)	Zero shift:	$\pm 3.2\%$ $\pm 3.2 \times \frac{25}{\chi} \%$	$(\chi \geq 25\text{kPa } \{2500\text{mmH}_2\text{O}\})$ $(\chi < 25\text{kPa } \{2500\text{mmH}_2\text{O}\})$
Change of 30°C ⁽³⁾ (Range from -5 to 55°C)	Combined shift:	$\pm 4.5\%$ $\pm 4.5 \times \frac{25}{\chi} \%$	$(\chi \geq 25\text{kPa } \{2500\text{mmH}_2\text{O}\})$ $(\chi < 25\text{kPa } \{2500\text{mmH}_2\text{O}\})$

JTH940A (for general purpose and high-temperature models)

Material for Wetted Parts: SUS316

Flange diameter: Flush diaphragm 3in. (80mm) Extended diaphragm 4in. (100mm)

Accuracy ⁽³⁾	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range)	Zero shift:	$\pm (0.25 + 0.5 \times \frac{350}{\chi}) \%$	
Change of 55°C ⁽³⁾	Combined shift:	$\pm 1.05\%$ $\pm (0.35 + 0.7 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$

JTH940A (for general purpose and high-temperature models)

Material for Wetted Parts: Hastelloy C, Tantalum

Flange Diameter: Flush diaphragm 3in. (80mm)

Accuracy ⁽³⁾	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range)	Zero shift:	$\pm (0.15 + 0.5 \times \frac{350}{\chi}) \%$	
Change of 30°C (Range from -5 to 55°C) ⁽³⁾	Combined shift:	$\pm 0.9\%$ $\pm (0.35 + 0.55 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$

JTH960A (for general purpose and high-temperature models)**Material for Wetted Parts: SUS316****Flange diameter: Flush diaphragm 3in. (80mm) Extended diaphragm 4in. (100mm)**

Accuracy ^(*)	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{35\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{35\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 55°C ^(*)	Zero shift:	$\pm (0.25 + 0.5 \times \frac{3.5}{\chi}) \%$	
	Combined shift:	$\pm 1.05\%$ $\pm (0.35 + 0.7 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{35\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{35\text{kgf/cm}^2\})$

JTH960A (for general purpose and high-temperature models)**Material for Wetted Parts: Hastelloy C, Tantalum****Flange Diameter: Flush diaphragm 3in. (80mm)**

Accuracy ^(*)	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{35\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{35\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 30°C ^(*) (Range from -5 to 55°C)	Zero shift:	$\pm (0.15 + 0.5 \times \frac{3.5}{\chi}) \%$	
	Combined shift:	$\pm 0.9\%$ $\pm (0.35 + 0.55 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{35\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{35\text{kgf/cm}^2\})$

JTH940A (for general purpose and high-temperature models)**Material for Wetted Parts: SUS316****Flange diameter: Flush diaphragm 2in. (50mm)/1.5in. (40mm) Extended diaphragm 3in. (80mm)/2in. (50mm)**

Accuracy ^(*)	Linear output:	$\pm 0.3\%$ $\pm (0.3 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 55°C ^(*)	Zero shift:	$\pm (0.25 + 0.5 \times \frac{350}{\chi}) \%$	
	Combined shift:	$\pm 1.05\%$ $\pm (0.35 + 0.7 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$

JTH940A (for general purpose and high-temperature models)**Material for Wetted Parts: Hastelloy C, Tantalum****Flange diameter: Flush diaphragm 2in. (50mm)/1.5in. (40mm)**

Accuracy ^(*)	Linear output:	$\pm 0.3\%$ $\pm (0.3 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 30°C ^(*) (Range from -5 to 55°C)	Zero shift:	$\pm 0.68\%$ $(0.68 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
	Combined shift:	$\pm 1.75\%$ $\pm (1.75 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$

JTH960A (for general purpose and high-temperature models)

Material for Wetted Parts: SUS316

Flange diameter: Flush diaphragm 2in. (50mm)/1.5in. (40mm) Extended diaphragm 3in. (80mm)/2in. (50mm)

Accuracy ^(*)	Linear output:	$\pm 0.4\%$ $\pm (0.4 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{35\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{35\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range)	Zero shift:	$\pm (0.25 + 0.5 \times \frac{3.5}{\chi}) \%$	
Change of 55°C ^(*)	Combined shift:	$\pm 1.5\%$ $\pm (0.35 + 0.7 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$

JTH960A (for general purpose and high-temperature models)

Material for Wetted Parts: Hastelloy C, Tantalum

Flange diameter: Flush diaphragm 2in. (50mm)/1.5in. (40mm)

Accuracy ^(*)	Linear output:	$\pm 0.4\%$ $\pm (0.4 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range)	Zero shift:	$\pm 0.68\%$ $(0.68 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
Change of 30°C ^(*) (Range from -5 to 55°C)	Combined shift:	$\pm 1.75\%$ $\pm (1.75 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$

JTH980A (for general purpose models)

Material for Wetted Parts: SUS316

Flange diameter: 2in. wafer Bottom diaphragm

Accuracy ^(*)	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{7}{\chi}) \%$	$(\chi \geq 7\text{MPa } \{7.0\text{kgf/cm}^2\})$ $(\chi < 7\text{MPa } \{7.0\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range)	Zero shift:	$\pm (0.25 + 0.5 \times \frac{7}{\chi}) \%$	
Change of 55°C ^(*)	Combined shift:	$\pm 1.05\%$ $\pm (0.35 + 0.7 \times \frac{7}{\chi}) \%$	$(\chi \geq 7\text{MPa } \{7.0\text{kgf/cm}^2\})$ $(\chi < 7\text{MPa } \{7.0\text{kgf/cm}^2\})$

Notes) ⁽¹⁾: URV denotes the value for 100% (20 mA DC) output.

⁽²⁾: LRV denotes value for 0% (4 mA DC) output.

⁽³⁾: Within a range of URV ≥ 0 and LRV ≥ 0

Dual diaphragm JTH920A/940A/960A (for general purpose, oxygen and chlorine)

Material for Wetted Parts: SUS316, SUS316L, Hastelloy C, Tantalum

Flange diameter: Flush diaphragm 3in. (80mm)/2in. (50mm)

Accuracy	(Original accuracy ± 0.1) %	
Temperature characteristics	(Original Temperature characteristics $\times 2$) %	* For original accuracy, temperature characteristics, refer to pages 7 to 9)

JTH940A (for high-temperature vacuum and high-temperature high vacuum models)**Material for Wetted Parts: SUS316/SUS316L****Flange diameter: Flush diaphragm 3in. (80mm) Extended diaphragm 4in. (100mm)**

Accuracy ^(*)	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{350}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 30°C (Range from -5 to 55°C) ^(*)	Zero shift:	$\pm (0.15 + 0.45 \times \frac{350}{\chi}) \%$	
	Combined shift:	$\pm 0.9\%$ $\pm (0.35 + 0.55 \times \frac{3.5}{\chi}) \%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$ $(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$

JTH940A (for high-temperature vacuum and high-temperature high vacuum models)**Material for Wetted Parts: Hastelloy C, Tantalum****Flange diameter: Flush diaphragm 3in. (80mm) Extended diaphragm 4in. (100mm)**

Accuracy ^(*)	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{350}{\chi}) \%$	
Temperature characteristics (Shift from the set range) Change of 30°C (Range from -5 to 55°C) ^(*)	Zero shift:	$\pm (0.15 + 0.5 \times \frac{350}{\chi}) \%$	
	Combined shift:	$\pm 0.9\%$ $\pm (0.35 + 0.55 \times \frac{350}{\chi}) \%$	

JTH960A (for high-temperature vacuum and high-temperature high vacuum models)**Material for Wetted Parts: SUS316/SUS316L****Flange diameter: Flush diaphragm 3in. (80mm) Extended diaphragm 4in. (100mm)**

Accuracy ^(*)	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{3.5}{\chi}) \%$	
Temperature characteristics (Shift from the set range) Change of 30°C (Range from -5 to 55°C) ^(*)	Zero shift:	$\pm (0.15 + 0.45 \times \frac{3.5}{\chi}) \%$	
	Combined shift:	$\pm 0.9\%$ $\pm (0.35 + 0.55 \times \frac{3.5}{\chi}) \%$	

JTH960A (for high-temperature vacuum and high-temperature high vacuum models)**Material for Wetted Parts: Hastelloy C, Tantalum****Flange diameter: Flush diaphragm 3in. (80mm) Extended diaphragm 4in. (100mm)**

Accuracy ^(*)	Linear output:	$\pm 0.2\%$ $\pm (0.05 + 0.15 \times \frac{3.5}{\chi}) \%$	
Temperature characteristics (Shift from the set range) Change of 30°C (Range from -5 to 55°C) ^(*)	Zero shift:	$\pm (0.15 + 0.50 \times \frac{3.5}{\chi}) \%$	
	Combined shift:	$\pm 0.9\%$ $\pm (0.35 + 0.55 \times \frac{3.5}{\chi}) \%$	

Notes) ^(*): URV denotes the value for 100% (20 mA DC) output.^(*): LRV denotes value for 0% (4 mA DC) output.^(*): Within a range of URV ≥ 0 and LRV ≥ 0

JTH940A (for high-temperature vacuum and high-temperature high vacuum models)

Material for Wetted Parts: SUS316/SUS316L

Flange diameter: Flush diaphragm 2in. (50mm)/1.5in. (40mm) Extended diaphragm 3in. (80mm)/2in. (50mm)

Accuracy ^(*)	Linear output:	$\pm 0.2\%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (0.05 + 0.15 \times \frac{350}{\chi}) \%$	$(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 30°C (Range from -5 to 55°C) ^(*)	Zero shift:	$\pm (0.15 + 0.45 \times \frac{350}{\chi}) \%$	
	Combined shift:	$\pm 0.9\%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (0.35 + 0.55 \times \frac{350}{\chi}) \%$	$(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$

JTH940A (for high-temperature vacuum and high-temperature high vacuum models)

Material for Wetted Parts: Hastelloy C, Tantalum

Flange diameter: Flush diaphragm 2in. (50mm)/1.5in. (40mm)

Accuracy ^(*)	Linear output:	$\pm 0.3\%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (0.3 \times \frac{350}{\chi}) \%$	$(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 30°C (Range from -5 to 55°C) ^(*)	Zero shift:	$\pm 0.68\%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
		$(0.68 \times \frac{350}{\chi}) \%$	$(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
	Combined shift:	$\pm 1.75\%$	$(\chi \geq 350\text{kPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (1.75 \times \frac{350}{\chi}) \%$	$(\chi < 350\text{kPa } \{3.5\text{kgf/cm}^2\})$

JTH960A (for high-temperature vacuum and high-temperature high vacuum models)

Material for Wetted Parts: SUS316/SUS316L

Flange diameter: Flush diaphragm 2in. (50mm)/1.5in. (40mm) Extended diaphragm 3in. (80mm)/2in. (50mm)

Accuracy ^(*)	Linear output:	$\pm 0.2\%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (0.2 \times \frac{210}{\chi}) \%$	$(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 30°C (Range from -5 to 55°C) ^(*)	Zero shift:	$\pm (0.1 + 0.45 \times \frac{3.5}{\chi}) \%$	
	Combined shift:	$\pm 0.9\%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (0.35 + 0.55 \times \frac{3.5}{\chi}) \%$	$(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$

JTH960A (for high-temperature vacuum and high-temperature high vacuum models)

Material for Wetted Parts: Hastelloy C, Tantalum

Flange diameter: Flush diaphragm 2in. (50mm)/1.5in. (40mm)

Accuracy ^(*)	Linear output:	$\pm 0.4\%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (0.4 \times \frac{3.5}{\chi}) \%$	$(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
Temperature characteristics (Shift from the set range) Change of 30°C (Range from -5 to 55°C) ^(*)	Zero shift:	$\pm 0.68\%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (0.68 \times \frac{3.5}{\chi}) \%$	$(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
	Combined shift:	$\pm 1.75\%$	$(\chi \geq 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$
		$\pm (1.75 \times \frac{3.5}{\chi}) \%$	$(\chi < 3.5\text{MPa } \{3.5\text{kgf/cm}^2\})$

Notes) ^(*): URV denotes the value for 100% (20 mA DC) output.

^(*): LRV denotes value for 0% (4 mA DC) output.

^(*): Within a range of URV ≥ 0 and LRV ≥ 0

Model Number Configuration Table

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style	Service (Fill fluid)	Process connection	
JTH920A	25 to 100kPa (250 to 1000kgf/cm ²)	Lowest pressure	Regular services (Silicon oil), High temperature (Silicon oil), Oxygen service (Fluorine oil)	Flush diaphragm 3 in. (80mm)
JTH940A	35 to 3500kPa (0.35 to 35kgf/cm ²)	Low pressure	Regular service (Silicon oil), High temperature (Silicon oil), Oxygen service (Fluorine oil)	Flush diaphragm 3 in. (80mm)
JTH960A	0.7 to 10MPa (7 to 102kgf/cm ²)	High pressure	Regular service (Silicon oil), High temperature (Silicon oil), Oxygen service (Fluorine oil)	Flush diaphragm 3 in. (80mm)

Selections

Options 1

Basic model No. - I II III IV V VI VII VIII - IX X XI XII XIV -Options 2 Options 1, 2: Refer to page 27.

Basic Model No.

	Measuring span	2.5 to 100kPa(250 to 10,160mmH ₂ O)	JTH920A
		35 to 3500kPa(0.35 to 35kgf/cm ²)	JTH940A
		0.7 to 10MPa(7 to 102 kgf/cm ²)	JTH960A

Selections

I	Output	4 to 20mA	1		
		4 to 20mA(Analog FSK Communication)	2		*3
		Digital output (DE protocol)	3		*1, *2
II	Material of wetted part	SUS316 (Diaphragm : SUS316L)	2		
		Tantalum	4		
		Hastelloy C	H		
		SUS316L	8		
III	Fill Fluid	Regular type (Silicone oil)	1		
		For oxygen service (Fluorine oil)	2		
		For High temperature service (Silicon oil)	3		
IV	Flange rating *29	JIS 10K		A	
		JIS 20K		C	
		JIS 30K		D	
		JIS 63K	*11	F	
		ANSI 150		G	
		ANSI 300		H	
		ANSI 600	*11	J	
		JPI 150		N	
		JPI 300		P	
		JPI 600	*11	Q	
V	Flange size	3 in. /80 mm	2		
VI	Flange type	Standard		1	
VII	Flange material/bolt and nut	Carbon steel		A	
		Carbon steel/SUS304		B	
		Carbon steel/SUS630		C	
		SUS304/Carbon steel		D	
		SUS304/SUS304		E	
		SUS304/SUS630		F	
		SUS316/Carbon steel		G	
		SUS316/SUS304		H	
		SUS316/SUS630		J	
		SUS316L/Carbon steel		K	
		SUS316L/SUS304		L	
SUS316L/SUS630		M			
VIII	Length of Capillary tube	2m		2	
		3m		3	
		4m		4	
		5m		5	
		6m		6	
		7m		7	
		8m		8	
		9m		Q	
		10m		A	
		Length of capillary tube with Olefin coating	2m		B
	3m			C	
	4m			H	
	5m			D	
	6m			J	
	7m			E	
	8m			F	
	9m			K	
	10m			G	

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 11 Dual diaphragm is not available for JIS63K, ANSI600 and JPI600 for a flange rating.
- 29 Flange rating should be selected based on the operative pressure range.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style		Service (Fill fluid)	Process connection
JTH920A	2.5 to 100kPa(250 to 10,160mmH ₂ O)	Lowest pressure	Chlorine service(Fluorine oil)	Flush diaphragm 3 in. (80mm)
JTH940A	35 to 3500kPa(0.35 to 35kgf/cm ²)	Low pressure	Chlorine service(Fluorine oil)	Flush diaphragm 3 in. (80mm)
JTH960A	0.7 to 10MPa(7 to 102 kgf/cm ²)	High pressure	Chlorine service(Fluorine oil)	Flush diaphragm 3 in. (80mm)

Selections Options 1

Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2

Options 1, 2: Refer to page 27.

Basic Model No.

	Measuring span	2.5 to 100kPa(250 to 10,160mmH ₂ O)	JTH920A
		35 to 3500kPa(0.35 to 35kgf/cm ²)	JTH940A
		0.7 to 10MPa(7 to 102 kgf/cm ²)	JTH960A

Selections

I	Output	4 to 20mA	1	
		4 to 20mA(Analog FSK Communication)	2	*3
		Digital output (DE protocol)	3	*1, *2
II	Material of wetted part	Tantalum	4	
III	Fill Fluid	For chlorine service (Fluorine oil)	5	
IV	Flange rating *29	JIS 10K		A
		JIS 20K		C
		JIS 30K		D
		*11 JIS 63K		F
		ANSI 150		G
		ANSI 300		H
		*11 ANSI 600		J
		JPI 150		N
		JPI 300		P
*11 JPI 600		Q		
V	Flange size	3 in. /80 mm	2	
VI	Flange type	Standard	1	
VII	Flange material/bolt and nut	Carbon steel		A
		Carbon steel/SUS304		B
		Carbon steel/SUS630		C
		SUS304/Carbon steel		D
		SUS304/SUS304		E
		SUS304/SUS630		F
		SUS316/Carbon steel		G
		SUS316/SUS304		H
		SUS316/SUS630		J
		SUS316L/Carbon steel		K
		SUS316L/SUS304		L
SUS316L/SUS630		M		
VIII	Length of Capillary tube	2m		2
		3m		3
		4m		4
		5m		5
		6m		6
		7m		7
		8m		8
		9m		Q
		10m		A
		Length of capillary tube with Olefin coating	2m	
	3m			C
	4m			H
	5m			D
	6m			J
	7m			E
	8m			F
	9m			K
	10m			G

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 11 Dual diaphragm is not available for JIS63K, ANSI600 and JPI600 for a flange rating.
- 29 Flange rating should be selected based on the operative pressure range.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style		Service (Fill fluid)	Process connection
JTH940A	3.5 to 3500kPa(0.35 to 35kgf/cm ²)	Low pressure	Chlorine service(Fluorine oil)	Flush diaphragm 2 in. (50mm)/1.5 in.(40mm)
JTH960A	0.7 to 10MPa(7 to 102 kgf/cm ²)	High pressure	Chlorine service(Fluorine oil)	Flush diaphragm 2 in. (50mm)/1.5 in.(40mm)

Selections Options 1

Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2

Options 1, 2: Refer to page 27.

Basic Model No.

	Measuring span	35 to 3500kPa(0.35 to 35kgf/cm ²)	JTH940A
		0.7 to 10MPa(7 to 102 kgf/cm ²)	JTH960A

Selections

I	Output	4 to 20mA	1	
		4 to 20mA(Analog FSK Communication)	2	*3
		Digital output (DE protocol)	3	*1, *2
II	Material of wetted part	Tantalum	4	
III	Fill Fluid	For chlorine service (Fluorine oil)	5	
IV	Flange rating *29	JIS 10K		A
		JIS 20K		C
		JIS 30K		D
		*11 JIS 63K		F
		ANSI 150		G
		ANSI 300		H
		*11 ANSI 600		J
		JPI 150		N
		JPI 300		P
*11 JPI 600		Q		
V	Flange size	2 in./50mm		3
		1.5 in./40mm		4
VI	Flange type	Standard		1
VII	Flange material/bolt and nut	Carbon steel		A
		Carbon steel/SUS304		B
		Carbon steel/SUS630		C
		SUS304/Carbon steel		D
		SUS304/SUS304		E
		SUS304/SUS630		F
		SUS316/Carbon steel		G
		SUS316/SUS304		H
		SUS316/SUS630		J
		SUS316L/Carbon steel		K
		SUS316L/SUS304		L
		SUS316L/SUS630		M
VIII	Length of Capillary tube	2m		2
		3m		3
		4m		4
		5m		5
		2m		B
	Length of capillary tube with Olefin coating	3m		C
		4m		H
		5m		D

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 11 Dual diaphragm is not available for JIS63K, ANSI600 and JPI600 for a flange rating.
- 29 Flange rating should be selected based on the operative pressure range.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style		Service (Fill fluid)	Process connection
JTH940A	35 to 3500kPa (0.35 to 35kgf/cm ²)	Low pressure	High temperature and vacuum (Silicon oil), High temperature and high vacuum (Silicon oil)	Flush diaphragm 2 in. (50 mm)/1.5 in. (40mm)
JTH960A	0.7 to 10MPa (7 to 102kgf/cm ²)	High pressure	High temperature and vacuum (Silicon oil), High temperature and high vacuum (Silicon oil)	Flush diaphragm 2 in. (50 mm)/1.5 in. (40mm)

Selections Options 1

Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2

Options 1, 2: Refer to page 27.

Basic Model No.

	Measuring span	35 to 3500kPa(0.35 to 35kgf/cm ²)	JTH940A
		0.7 to 10MPa(7 to 102 kgf/cm ²)	JTH960A

Selections

I	Output	4 to 20mA	1	
		4 to 20mA(Analog FSK Communication)	2	*3
		Digital output (DE protocol)	3	*1, *2
II	Material of wetted part	SUS316L	8	
		Tantalum *15	4	
		Hastelloy C	H	
III	Fill Fluid	For high temperature vacuum (Silicon oil)	4	
		For high temperature high vacuum (Silicon oil)	7	
IV	Flange rating *29	JIS 10K		A
		JIS 20K		C
		JIS 30K		D
		JIS 63K		F
		ANSI 150		G
		ANSI 300		H
		ANSI 600		J
		JPI 150		N
		JPI 300		P
JPI 600		Q		
V	Flange size	2 in. /50mm		3
		1.5 in. /40mm		4
VI	Flange type	Standard		1
VII	Flange material/bolt and nut	Carbon steel		A
		Carbon steel/SUS304		B
		Carbon steel/SUS630		C
		SUS304/Carbon steel		D
		SUS304/SUS304		E
		SUS304/SUS630		F
		SUS316/Carbon steel		G
		SUS316/SUS304		H
		SUS316/SUS630		J
		SUS316L/Carbon steel		K
		SUS316L/SUS304		L
SUS316L/SUS630		M		
VIII	Length of Capillary tube	2m		2
		3m		3
		4m		4
		5m		5

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 15 If the fill fluid is for high temperature service and wetted part material is Tantalum, the applicable temperature range of wetted part is from -10 to 180 deg.C
- 29 Flange rating should be selected based on the operative pressure range.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style		Service (Fill fluid)	Process connection
JTH920A	2.5 to 100kPa (250 to 10,160mmH ₂ O)	Lowest pressure	Regular service(Silicon oil), High temperature (Silicon oil), Oxygen service(Fluorine oil)	Extended flange type 4 in.(100mm)
JTH940A	35 to 3500kPa (0.35 to 35kgf/cm ₂)	Low pressure	Regular service(Silicon oil), High temperature (Silicon oil), Oxygen service(Fluorine oil)	Extended flange type 4 in.(100mm)
JTH960A	0.7 to 10MPa (7 to 102 kgf/cm ₂)	High pressure	Regular service(Silicon oil), High temperature (Silicon oil), Oxygen service(Fluorine oil)	Extended flange type 4 in.(100mm)

Selections Options 1

Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2 Options 1, 2: Refer to page 27.

Basic Model No.

	Measuring span	2.5 to 100kPa(250 to 10,160mmH ₂ O)	JTH920A
		35 to 3500kPa(0.35 to 35kgf/cm ₂)	JTH940A
		0.7 to 10MPa(7 to 102 kgf/cm ₂)	JTH960A

Selections

I	Output	4 to 20mA	1	
		4 to 20mA(Analog FSK Communication)	2	*3
		Digital output (DE protocol)	3	*1, *2
II	Material of wetted part	SUS316 (Diaphragm : SUS316L)	2	
		SUS316L	8	
III	Fill Fluid	Regular type (Silicone oil)	1	
		For oxygen service (Fluorine oil)	2	
		For High temperature service (Silicon oil)	3	
IV	Flange rating *29	JIS 10K		A
		JIS 20K		C
		JIS 30K		D
		ANSI 150		G
		ANSI 300		H
		JPI 150		N
V	Flange size	JPI 300		P
		4 in./100mm	1	
VI	Flange type	Length of extended part 50mm		2
		Length of extended part 100mm		3
		Length of extended part 150mm		4
		Length of extended part 200mm		5
		Length of extended part 250mm		6
		Length of extended part 300mm		7
VII	Flange material/bolt and nut	Carbon steel		A
		Carbon steel/SUS304		B
		Carbon steel/SUS630		C
		SUS304/Carbon steel		D
		SUS304/SUS304		E
		SUS304/SUS630		F
		SUS316/Carbon steel		G
		SUS316/SUS304		H
		SUS316/SUS630		J
		SUS316L/Carbon steel		K
		SUS316L/SUS304		L
SUS316L/SUS630		M		
VIII	Length of Capillary tube	2m		2
		3m		3
		4m		4
		5m		5
		6m		6
		7m		7
		8m		8
		9m		Q
		10m		A
		Length of capillary tube with Olefin coating	2m	
	3m			C
	4m			H
	5m			D
	6m			J
	7m			E
	8m			F
	9m			K
	10m			G

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 29 Flange rating should be selected based on the operative pressure range.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style		Service (Fill fluid)	Process connection
JTH940A	35 to 3500kPa (0.35 to 35kgf/cm ²)	Low pressure	High temperature and vacuum (Silicon oil), High temperature and high vacuum (Silicon oil)	Extended flange type 4 in. (100mm)
JTH960A	0.7 to 10MPa (7 to 102kgf/cm ²)	High pressure	High temperature and vacuum (Silicon oil), High temperature and high vacuum (Silicon oil)	Extended flange type 4 in. (100mm)

Selections

Options 1

Options 1, 2: Refer to page 27.

Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2

Basic Model No.

	Measuring span	35 to 3500kPa(0.35 to 35kgf/cm ²)	JTH940A
		0.7 to 10MPa(7 to 102 kgf/cm ²)	JTH960A

Selections

I	Output	4 to 20mA	1	
		4 to 20mA(Analog FSK Communication)	2	*3
		Digital output (DE protocol)	3	*1, *2
II	Material of wetted part	SUS316 (Diaphragm : SUS316L)	2	
		SUS316L	8	
III	Fill Fluid	For high temperature vacuum (Silicon oil)	4	
		For high temperature high vacuum (Silicon oil)	7	
IV	Flange rating *29	JIS 10K		A
		JIS 20K		C
		JIS 30K		D
		ANSI 150		G
		ANSI 300		H
		JPI 150		N
		JPI 300		P
V	Flange size	4 in./100A	1	
VI	Flange type	Length of extended part 50mm		2
		Length of extended part 100mm		3
		Length of extended part 150mm		4
		Length of extended part 200mm		5
		Length of extended part 250mm		6
		Length of extended part 300mm		7
VII	Flange material/bolt and nut	Carbon steel		A
		Carbon steel/SUS304		B
		Carbon steel/SUS630		C
		SUS304/Carbon steel		D
		SUS304/SUS304		E
		SUS304/SUS630		F
		SUS316/Carbon steel		G
		SUS316/SUS304		H
		SUS316/SUS630		J
		SUS316L/Carbon steel		K
SUS316L/SUS304		L		
SUS316L/SUS630		M		
VIII	Length of Capillary tube	2m		2
		3m		3
		4m		4
		5m		5
		6m		6
		7m		7
		8m		8
		9m		Q
		10m		A

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 29 Flange rating should be selected based on the operative pressure range.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style		Service (Fill fluid)	Process connection
JTH940A	35 to 3500kPa (0.35 to 35kgf/cm ²)	Low pressure	High temperature and vacuum(Silicon oil), High temperature and high vacuum(Silicon oil)	Extended flange type 3 in.(80mm)/2 in.(50 mm)
JTH960A	0.7 to 10MPa (7 to 102 kgf/cm ²)	High pressure	High temperature and vacuum(Silicon oil), High temperature and high vacuum(Silicon oil)	Extended flange type 3 in.(80mm)/2 in.(50 mm)

Selections

Options 1

Options 1, 2: Refer to page 27.

Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2

Basic Model No.

	Measuring span	35 to 3500kPa(0.35 to 35kgf/cm ²)	JTH940A
		0.7 to 10MPa(7 to 102 kgf/cm ²)	JTH960A

Selections

I	Output	4 to 20mA	1	
		4 to 20mA(Analog FSK Communication)	2	*3
		Digital output (DE protocol)	3	*1, *2
II	Material of wetted part	SUS316 (Diaphragm : SUS316L)	2	
		SUS316L	8	
III	Fill Fluid	For high temperature vacuum (Silicon oil)	4	
		For high temperature high vacuum (Silicon oil)	7	
IV	Flange rating *29	JIS 10K		A
		JIS 20K		C
		JIS 30K		D
		ANSI 150		G
		ANSI 300		H
		JPI 150		N
		JPI 300		P
V	Flange size	3 in. /80 mm		2
		2 in./50 mm		3
VI	Flange type	Length of extended part 50mm		2
		Length of extended part 100mm		3
		Length of extended part 150mm		4
VII	Flange material/bolt and nut	Carbon steel		A
		Carbon steel/SUS304		B
		Carbon steel/SUS630		C
		SUS304/Carbon steel		D
		SUS304/SUS304		E
		SUS304/SUS630		F
		SUS316/Carbon steel		G
		SUS316/SUS304		H
		SUS316/SUS630		J
		SUS316L/Carbon steel		K
		SUS316L/SUS304		L
SUS316L/SUS630		M		
VIII	Length of Capillary tube	2m		2
		3m		3
		4m		4
		5m		5

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 29 Flange rating should be selected based on the operative pressure range.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style		Service (Fill fluid)	Process connection
JTH960A	0.7 to 10MPa (7 to 102 kgf/cm ²)	High pressure	Regular service(Silicon oil), High temperature (Silicon oil), Oxygen service(Fluorine oil)	Button diaphragm type 1 1/2 in. external screw
JTH980A	0.7 to 42MPa (7 to 420kgf/cm ²)	Super high pressure	Regular service(Silicon oil), High temperature (Silicon oil), Oxygen service(Fluorine oil)	Button diaphragm type 1 1/2 in. external screw

Selections

Options 1

Options 1, 2: Refer to page 27.

Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2

Basic Model No.

	Measuring span	0.7 to 10MPa(7 to 102 kgf/cm ²)	JTH960A
		0.7 to 42MPa (7 to 420kgf/cm ²)	JTH980A

Selections

I	Output	4 to 20mA	1			
		4 to 20mA(Analog FSK Communication)	2	*3		
		Digital output (DE protocol)	3	*1, *2		
II	Material of wetted part	SUS316 (Diaphragm : SUS316L)	2			
		SUS316L	8			
III	Fill Fluid	Regular type (Silicone oil)	1			
		For oxygen service (Fluorine oil)	2			
IV	Flange rating	No flange used		W		
V	Flange size	G 1 1/2 Button diaphragm 1 1/2in. External screw			V	
VI	Flange type	Standard			1	
VII	Flange material/bolt and nut	SUS304/Carbon steel			D	
		SUS304/SUS304	*31		E	
		SUS304/SUS630			F	
VIII	Length of Capillary tube	2m			2	
		3m			3	
		4m			4	
		5m			5	
	Length of capillary tube with Olefin coating	2m				B
		3m				C
		4m				H
		5m			D	

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 31 Available only for JTH960A.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Model	Pressure range/style		Service (Fill fluid)	Process connection
JTH940A	35 to 3500kPa (0.35 to 35kgf/cm ²)	Low pressure	High temperature and vacuum(Silicon oil), High temperature and high vacuum (Silicon oil)	2in. Wafer diaphragm
JTH960A	0.7 to 10MPa (7 to 102 kgf/cm ²)	High pressure	High temperature and vacuum(Silicon oil), High temperature and high vacuum (Silicon oil)	2in. Wafer diaphragm

Selections Options 1

Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2

Options 1, 2: Refer to page 27.

Basic Model No.

	Measuring span	35 to 3500kPa(0.35 to 35kgf/cm ²)	JTH940A
		0.7 to 10MPa(7 to 102 kgf/cm ²)	JTH960A

Selections

I	Output	4 to 20mA	1				
		4 to 20mA(Analog FSK Communication)	2	*3			
		Digital output (DE protocol)	3	*1, *2			
II	Material of wetted part	SUS316L	8				
III	Fill Fluid	For high temperature vacuum (Silicon oil)	4				
		For high temperature high vacuum (Silicon oil)	7				
IV	Flange rating	No flange used			W		
V	Flange size	2 in. wafer				W	
VI	Flange type	Standard					1
VII	Material of Bolt/nut	Carbon steel					N
		SUS630					Q
VIII	Length of Capillary tube	2m					2
		3m					3
		4m					4
		5m					5
		6m					6
		7m					7
		8m					8
		9m					Q
		10m					A

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Selections Options 1
 Basic model No. - I II III IV V VI VII VIII - IX XXI XII XIII XIV -Options 2

Options1

IX	Electrical connection / explosion-proof	G1/2, Watertight	X
		G1/2, JIS Flameproof with 1 pc. Of cable gland attached.	2
		G1/2, JIS Flameproof with 2 pcs. Of cable gland attached.	3
		G1/2, intrinsically safe *3	6
		1/2 NPT, Watertight	A
X	Building indicating smart meter	None	X
		0 to 100 % linear scales	1
		Engineering unit scales	2
XI	Finish	Standard	X
		Corrosion-resistant	A
		Corrosion-proof	B
		Corrosion-resistant (Silver coating)	D
XII	Finish of gasket face	Standard (JISRa3.2(12.5S))	X
XIII	Burnout feature *1	None	X
		Upper limit of output at abnormal condition	U
		Lower limit of output at abnormal condition	D
XIV	Mounting bracket	None	X
		Carbon steel	1
		Direct mounting *14 *11	P
		SUS304	2

Option 2

XX	No options
A2	External Zero adjustment *2
A4	Lightning arrestor
B7	For mounting a high load resistance smart meter
C1	Color : Red (Munsell 5R4/13)
C2	Color : Yellow (Munsell 2.5Y8/16))
C3	Color : Blue (Munsell 7.5BG7/2)
C7	Process connection ; reverse
D1	Water free finish (included oil free finish) *16 *17
D2	Oil free finish *16 *17
D3	FEP protective film *24 *14
G1	One elbow (left)
G2	One elbow (right)
G3	2 elbows
G6	Adapter for dual diaphragm
J8	Special burn-out feature (3.2mA) *18
T1	Test report
T2	Material certificate *19
T5	Strength calculation sheet *20
T6	Withstand pressure and airtight test (for regular service) *21
T8	Traceability certificate
U2	Non-SI unit conformance

Notes

- 1 Digital output (DE protocol) should be selected with upper/lower direction of burn out feature.
- 2 Digital output (DE protocol) can not be combined with an external zero adjustment function.
- 3 Analog FSK Communication can not be combined with Intrinsically safe.
- 11 Dual diaphragm is not available for JIS63K, ANSI1600 and JPI600 for a flange rating.
- 14 This selection is not available for high temperature service/high temperature vacuum service/high temperature high vacuum service
- 16 When the fill fluid is for oxygen or choline service, there is not needed to select this.
- 17 The carbon steel for meterbody cover material is not available for this option.
- 18 This should be selected with upper/lower direction of burn out feature.
- 19 Available only for material of wetted part.
- 20 When ordering, designed pressure and designed temperature are required.
- 21 When ordering, withstand pressure and airtight test pressure are required.
- 24 Not available for extended diaphragm type or dual diaphragm.

DSTJ3000 ACE Electric Pressure Transmitter Remote-sealed diaphragm style

Dual diaphragm adapter (Flush flange 2 in.),

For regular service (fill fluid : silicon oil), oxygen service and chlorine service(fill fluid : Florine oil)

Selections Options
 HH - I II III IV V VI VII - VIII

Basic Model No.

	Adpater for dual diaphragm	HH
--	----------------------------	----

Selections

I	Transmitter model number	JTE with 1 adapter	H	
II	Material of wetted part	SUS316 (Diaphragm:SUS316L)	2	
		Tantalum	4	
		SUS316L	8	
III	Fill fluid	Regular type (Silicone oil)	1	
		For oxygen service (Fluorine oil)	2	
		For Chlorine service (Fluorine oil)	5	
IV	Flange rating	JIS 10K		A
		JIS 20K		C
		JIS 30K		D
		ANSI 150		G
		ANSI 300		H
		JPI 150		N
		JPI 300		P
V	Flange size	2 in. /50 mm	3	
VI	Flange type	Standard (Flush diaphragm)	1	
VII	Finish of gasket face	Standard		X

Options

VIII		No options		XX
	*13	Water free and oil free treatment		D1
	*13	Oil free treatment		D2
	*13	Material certificate		T2
	*13	Pressure test		T7

Notes

13 When this option is selected, the same option for transimtter must be selected.

azbil

Yamatake Corporation
Advanced Automation Company

1-12-2 Kawana, Fujisawa
Kanagawa 251-8522 Japan

URL:<http://www.azbil.com>