

G-O-Motor

Spring or Springless Type

Piston Cylinder Actuator

Introduction

G-O-Motor is an air operated actuator more compact in size but more powerful in output and stroke as compared with an Air-O-Motor. G-O-Motors have wide range of application such as actuators for butterfly valves and adjustable port valves, vane control of blowers, variable resistors or any other mechanical controls requiring a proportional position control. There are spring type and springless type G-O-Motors.

Standard specifications

Spring type

Type : Vertical type, with positioner and top mounted handwheel

Action : Direct acting

Material : Cylinder; Cast iron (FC 200)
Piston; Cast iron (FC 200)
Piston rod; Stainless steel (SUS 403)
"O"ring; Nitril butadiene rubber

Input : With model HTP pneumatic positioner;
0.2~1.0 kgf/cm² (standard),
0.2~0.6, 0.6~1.0 kgf/cm² are available.
With model HEP electric positioner;
4~20mA DC (standard), 4~12 and 12~20mA
DC are available.

Spring range : 0.2~1.0 kgf/cm² (20~98kPa)

Air supply pressure : 1.4 kgf/cm² (140kPa)

Air consumption (normal state) :

With model HTP pneumatic positioner; 7 Nℓ/min. or less

With model HEP electric positioner; 5 Nℓ/min. or less

Air connection : Rc 1/4 internal thread

Ambient temperature : 0~70°C

Optional accessories : Pressure regulator with filter, limit switch, motion transmitter, volume booster, air lock relay and others.

Performance :

Output power, Refer to Table 1, Page 2

Hysteresis error; Within 1% FS

Linearity; Within ±1% FS

Springless type

Type : Vertical or horizontal, with G-O-Pilot and with or without handwheel.


Action : Direct or reverse

Material : Cylinder; Cast iron (FC 200)
Piston; Cast iron (FC 200)
Piston rod; Stainless steel (SUS 403)
"O"ring; Nitrile-butadiene rubber
G-O-Pilot;
Body...Aluminium alloy
Rebalancing mechanism case...
Cast iron(FC 200)

Input : 0.2~1.0 kgf/cm² (standard),
0.2~0.6, 0.6~1.0 kgf/cm² are available.



Spring type

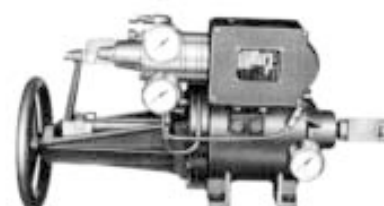Springless type
(Vertical type)

Springless type (Horizontal type)

Supply air pressure : 2.0 kgf/cm² (200kPa)

Air consumption (normal state) :

G-O-Pilot...10 Nℓ/min. or less

Air connection : Rc 1/4 internal thread

Ambient temperature : 0~70°C

Optional accessories : Pressure regulator with filter, limit switch, motion transmitter, volume booster, air lock relay, and others

Performance :

Output power; Refer to Table 1.

Hysteresis error; Within 2%FS

Linearity; Within ±2%FS

External dimensions : Refer to Fig.1, 2 and Table 2, 3.

Weight : Refer to Fig. 1, 2 and Table 2, 3.

Finish : Grayish green (Munsell 5B4/1) or silver, or other specified colors.

Table 1. Output power**Table 1-1. Spring type**

Basic Model No.	Cylinder dia.x Travel (mm)	Power kgf (N)	
		Downward	Upward
GOM 83 S	φ 200×75	280~95.0 (2740~930)	45.0~235 (440~2300)
GOM 84 S	φ 200×100	280~95.0 (2740~930)	45.0~235 (440~2300)
GOM 103 S	φ 250×75	440~145 (4310~1420)	75.0~370 (740~3630)
GOM 124 S	φ 300×100	640~210 (6280~2060)	105~530 (1030~5200)

Note : The power are shown for the strokes at upper and lower limits.



Table 1-2. Springless type (Vertical type, with manual handwheel)

Basic Model No.	Cylinder dia.x Travel (mm)	Power		Rebalancing mechanism
		Thrust kgf (N)	Torque kgf·cm (N·m) Rotating angle 60°	
GOM 64LM	φ 150×100	270 (2650)	2330 (228)	Plate cam type
GOM 84LM	φ 200×100	470 (4610)	4070 (399)	Plate cam type
GOM 124LM	φ 300×100	1100 (10800)	9520 (934)	Plate cam type
GOM 154LM	φ 380×100	1700 (16700)	14720 (1444)	Plate cam type

Table 1-3. Springless type (Horizontal type)

Basic Model No.	Cylinder dia.x Travel (mm)	Power kgf (N)	Rebalancing mechanism
GOM 44L	φ 100×100	120 (1180)	Plate cam type
GOM 410L	φ 100×250	120 (1180)	Plate cam type
GOM 64L	φ 150×100	270 (2650)	Plate cam type
GOM 66L	φ 150×150	270 (2650)	Plate cam type
GOM 610L	φ 150×250	270 (2650)	Plate cam type
GOM 84L	φ 200×100	470 (4610)	Plate cam type
GOM 86L	φ 200×150	470 (4610)	Plate cam type
GOM 810L	φ 200×250	470 (4610)	Plate cam type
GOM 1210L	φ 300×250	1100 (10800)	Plate cam type
GOM 1510L	φ 380×250	1700 (16700)	Plate cam type

Notes. 1) Suffix letter "M" is added to the model no. for springless type (horizontal or vertical) with manual handwheel.
2) A safety factor of 0.5 ~ 0.7 to the output power is preferable to be taken for springless type when the control element is subjected to severe operating conditions (Poor stability or large inertia)

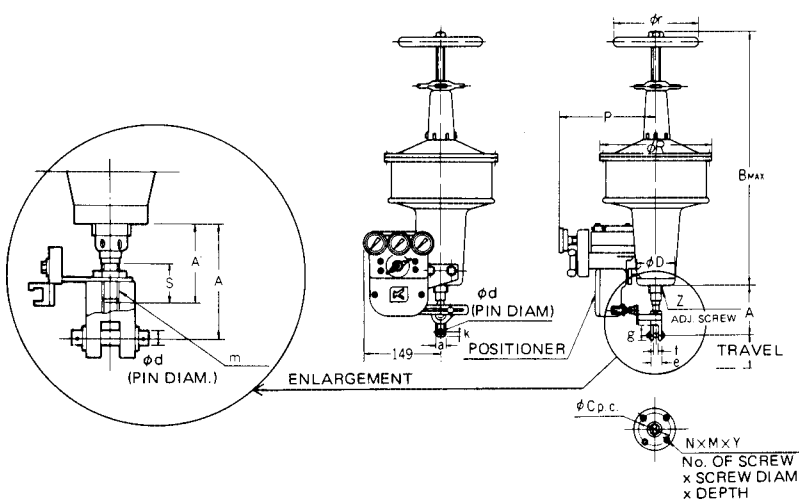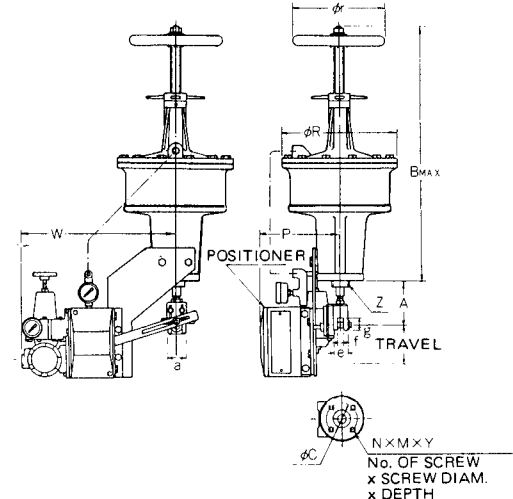**Figure 1-1. Spring type (With HTP positioner)****Figure 1-2. Spring type (With HEP positioner)****Table 2. Dimensions & weights for spring type****Table 2-1. Spring type (With HTP positioner)**

Basic Model No.	Dimension (mm) Weight (kg)	B _{MAX}	P	φ _r	φ _R	φ _D	Z	φ _{C_{pc}}	N×M×Y	A	k	g	e	f	a	φ _d	w/o Fork-end			Travel	Weight
																	A'	m	S		
GOM 83S		532	200	200	250	100	M42×1.5	70	4×M10×15	100	13	29	30	12	40	10 ^{f7}	78	M14	41	75	30
GOM 84S		655	200	200	250	102	M42×1.5	70	4×M10×15	105	14	30	34	12	45	10 ^{f7}	80	M16	44	100	35
GOM 103S		633	205	250	302	116	M45×1.5	80	4×M12×18	123	14	30	34	12	45	10 ^{f7}	100	M16	56	75	45
GOM 124S		779	220	280	363	134	M48×1.5	90	4×M16×20	136	15	33	34	15	45	12 ^{f7}	110	M16	50	100	69

Note) Numbers in "weight" is for G · O · Motor with HTP positioner.

Table 2-2. Spring type (With HEP positioner)

Basic Model No.	Dimension (mm) Weight (kg)	B _{MAX}	P	W	φ _r	φ _R	φ _D	Z	φ _{C_{pc}}	N×M×Y	A	k	g	e	f	a	φ _d	w/o Fork-end			Travel	Weight	E
																		A'	m	S			
GOM 83S		532	191	344	200	250	100	M42×1.5	70	4×M10×15	100	13	29	30	12	40	10 ^{f7}	78	M14	41	75	30	202
GOM 84S		655	191	344	200	250	102	M42×1.5	70	4×M10×15	105	14	30	34	12	45	10 ^{f7}	80	M16	44	100	35	210
GOM 103S		633	196	344	250	302	116	M45×1.5	80	4×M12×18	123	14	30	34	12	45	10 ^{f7}	100	M16	56	75	45	192
GOM 124S		779	211	354	280	363	134	M48×1.5	90	4×M16×20	136	15	33	34	15	45	12 ^{f7}	110	M16	50	100	69	236

Note) Numbers in "weight" is for G · O · Motor with HEP positioner.

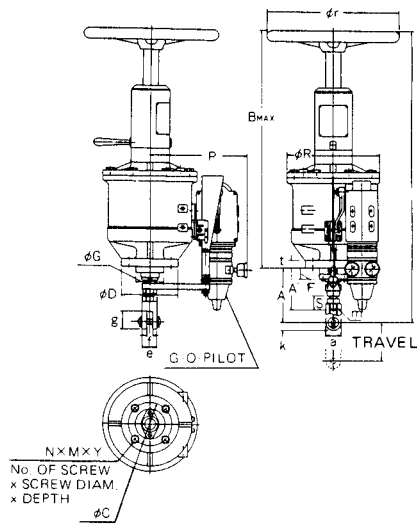


Figure 2-1. Springless type (Vertical type, with manual handwheel)
(GOM64LM, 84LM type)

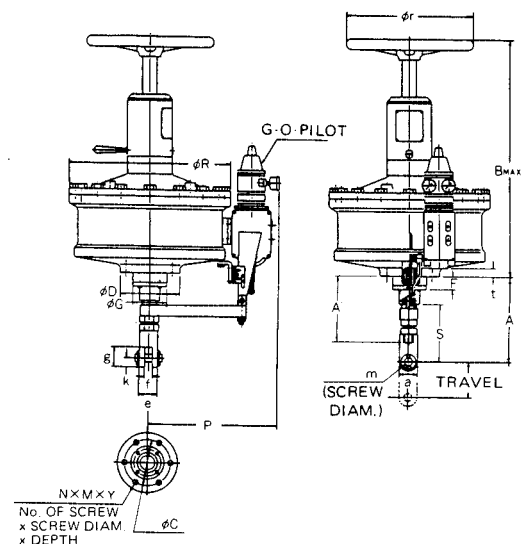


Figure 2-2. Springless type (Vertical type, with manual handwheel)
(GOM124LM, 154LM type)

Table 3. Springless type dimensions and weights

Table 3-1. Springless type (Vertical type, with manual handwheel)

Basic Model No.	Dimension (mm) Weight (kg)	B _{MAX}	P	φ _r	φ _R	φ _D	t	φ _G	F	φ _C	N x M x Y	A	k	g	e	f	a	φ _d	w/o fork-end			Travel	Weight
																			A'	m	S		
GOM 64LM		630	250	200	202	150	20	74	27	110	4 x M20 x 20	145	20	45	40	15	40	14 ^{f7}	115	M20	46	100	45
GOM 84LM		640	275	360	250	150	20	74	27	110	4 x M20 x 20	145	20	45	40	15	40	14 ^{f7}	115	M20	46	100	60
GOM124LM		600	335	360	356	130	—	74	32	104	4 x M14 x 17	220	22	47	40	18	44	18 ^{f7}	185	M24	64	100	80
GOM154LM		665	380	360	455	166	—	94	40	130	6 x M16 x 22	240	25	55	50	21	50	22 ^{f6}	200	M30 x 2	80	100	105

Note) Numbers in "weight" is for G · O · Motor with G · O · Pilot.

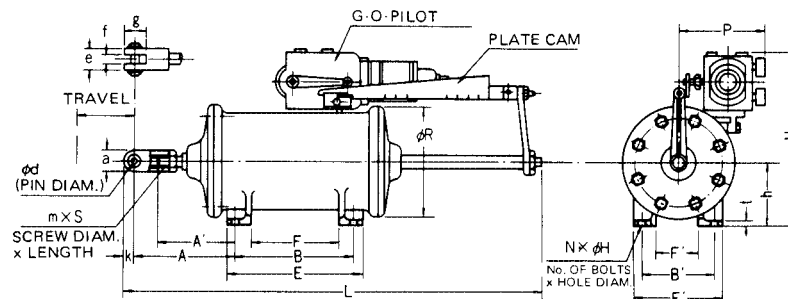


Figure 2-3. Springless type (Horizontal type)

Table 3-2. Springless type (Horizontal type)

Basic Model No.	Dimension (mm) Weight (kg)	L	P	φ _R	H	h	t	E	E'	F	F'	B	B'	N x φ _H	A	k	g	e	f	a	φ _d	w/o fork-end			Stroke	Weight
																						A'	m	S		
GOM 44L		541	165	144	265	80	10	99	144	25	70	75	120	4 x 11	165	15	33	35	15	30	12 ^{f7}	136	M16	45	100	22
GOM410L		835	175	144	275	90	10	236	150	160	70	210	120	4 x 11	175	15	33	35	15	30	12 ^{f7}	145	M16	45	250	30
GOM 64L		561	185	202	317	105	10	146	166	76	92	120	140	4 x 14	170	19	39	38	15	38	15 ^{f7}	143	M20	50	100	25
GOM 66L		663	183	202	315	110	10	150	170	60	80	120	140	4 x 14	195	19	39	38	15	38	15 ^{f7}	167	M20	50	150	37
GOM610L		886	175	202	327	115	10	250	170	160	70	220	140	4 x 14	200	19	39	38	15	38	15 ^{f7}	170	M20	50	250	41
GOM 84L		529	200	250	372	140	9	116	226	64	148	90	200	4 x 14	180	19	39	38	15	38	15 ^{f7}	150	M20	50	100	45
GOM 86L		635	180	250	367	135	9	146	226	94	148	120	200	4 x 14	195	19	39	38	15	38	15 ^{f7}	163	M20	50	150	50
GOM810L		833	175	250	397	155	12	255	260	175	164	215	220	4 x 18	195	19	39	38	15	38	15 ^{f7}	165	M20	50	250	60
GOM1210L		1080	175	352	505	210	12.7	240	310	140	194	190	260	4 x 21	335	30	65	60	26	60	25 ^{f7}	277	M38 x 1.5	76	250	80
GOM1510L		1120	175	455	595	250	16	240	460	120	310	180	400	4 x 28	345	30	65	60	26	60	25 ^{f7}	290	M38 x 1.5	77	250	130

Note) Numbers in "weight" is for G · O · Motor with G · O · Pilot.

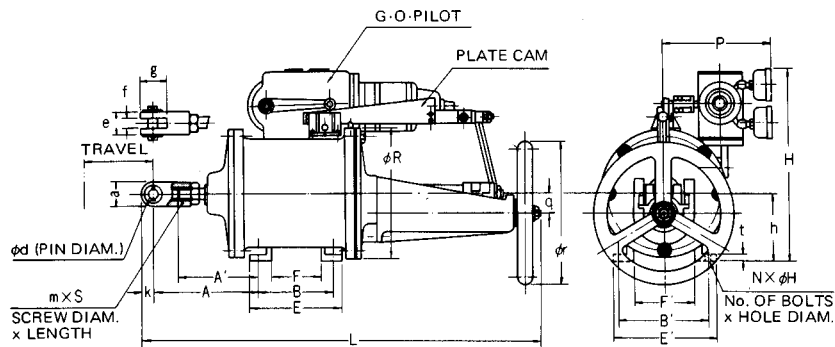


Figure 2-4. Springless type (Horizontal type, with manual handwheel)

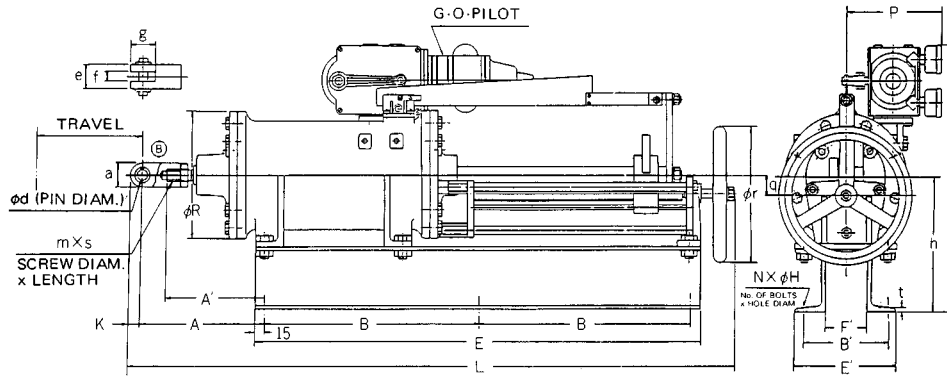


Figure 2-5. Springless type (Horizontal type, with manual handwheel and channel base)

Table 3-3. Springless type (Horizontal type, with manual handwheel)

Dimension (mm) Weight (kg)	L	P	φr	q	φR	H	h	t	E	E'	F	F'	B	B'	N x φH	A	k	g	e	f	a	φd	w/o fork-end			Stroke	Weight
																							A'	m	S		
Basic Model No.																											
GOM 44LM	624	165	140	30	144	265	80	10	99	144	25	70	75	120	4×11	165	15	33	35	15	30	12 ^{f7}	136	M16	45	100	24
GOM410LM	923	175	140	30	144	*350	*165	*5	*685	*150	—	*70	*327.5×2	*120	*6×11	*175	15	33	35	15	30	12 ^{f7}	145	M16	45	250	40
GOM 64LM	641	185	220	30	202	317	105	10	146	166	76	92	120	140	4×14	170	19	39	38	15	38	15 ^{f7}	143	M20	50	100	30
GOM 66LM	729	183	220	30	202	315	110	10	150	170	60	80	120	140	4×14	195	19	39	38	15	38	15 ^{f7}	167	M20	50	150	42
GOM610LM	978	175	220	30	202	*427	*215	*5	*715	*170	—	*70	*342.5×2	*140	*6×14	*200	19	39	38	15	38	15 ^{f7}	170	M20	50	250	65
GOM 84LM	590	200	220	30	250	372	140	9	116	226	64	148	190	200	4×14	180	19	39	38	15	38	15 ^{f7}	150	M20	50	100	50
GOM 86LM	697	180	220	30	250	367	135	9	146	226	94	148	120	200	4×14	195	19	39	38	15	38	15 ^{f7}	163	M20	50	150	55
GOM810LM	895	175	220	30	250	397	155	12	255	260	175	164	215	220	4×18	195	19	39	38	15	38	15 ^{f7}	165	M20	50	250	80
GOM1210LM	1201	175	400	55	352	505	210	12.7	240	310	140	194	190	260	4×21	335	30	65	60	26	60	25 ^{f7}	277	M38×1.5	76	250	130
GOM1510LM	1234	175	400	60	455	595	250	16	240	460	120	310	180	400	4×28	345	30	65	60	26	60	25 ^{f7}	290	M38×1.5	77	250	200

Note 1) Channel base is provided for models GOM410LM & 610LM. (* Represents the figures with channel base.)

2) Numbers in "weight" is for G · O · Motor with G · O · Pilot.

Ordering Information

When ordering, please specify :

- 1) Model number
- 2) For springless type
 - Direct or reverse acting.
- 3) Supply air pressure
- 4) Optional accessories

Specifications are subject to change without notice.

Yamatake Corporation

Totate International Building
2-12-19 Shibuya
Shibuya-ku Tokyo 150-8316
Tel : 81-3-3486-2216
Fax: 81-3-3486-2503

Yamatake-SIC Control Systems Co., Ltd.
Shanghai Yamatake Jinshan Control Instruments Co., Ltd.
Yamatake Korea Co., Ltd.
Yamatake (Thailand) Co., Ltd.
Yamatake Philippines, Inc.
PT. Yamatake Berca Indonesia
Yamatake Controls Singapore Pte. Ltd.
YCV Corporation

: China 86-10-6510-2505
: China 86-21-6428-8661
: Korea 82-2-785-0280~2
: Thailand 66-2-210-0900~7
: Philippines 63-2-817-6452
: Indonesia 62-21-230-5538
: Singapore 65-778-5966
: U.S.A. 1-602-548-1800

YAMATAKE

Savemation

Saving through Automation

Yamatake Industrial Systems Co., Ltd.

<http://www.yamatake.co.jp/>

This has been printed on recycled paper.

9909-Y/Y