


# ULTRASONIC-FLOWMETER NON-INVASIV / CLAMP-ON-SENSORS

Type: IS210-S

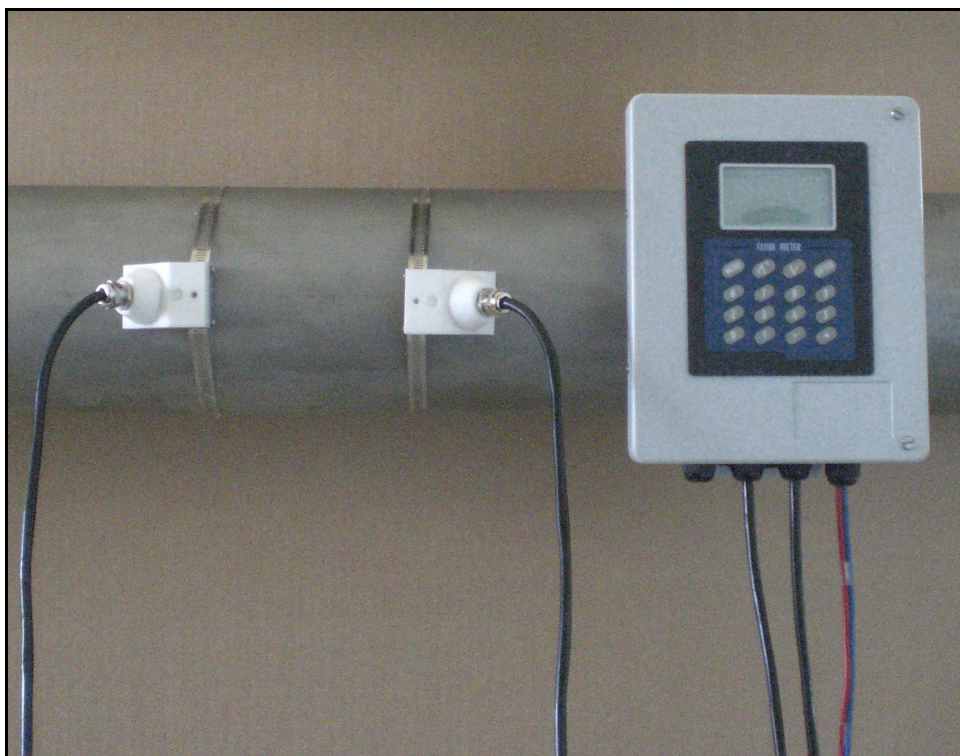

## Technical Information

2009

## Ultrasonic-Flowmeter – Principle of Measurement

IS210 transit time flow meter utilizes two transducers that function as both ultrasonic transmitters and receivers. The transducers are clamped on the outside of a closed pipe at a specific distance from each other. The transducers can be mounted in V-method in which case the ultra sound transverses the pipe twice, or W-method in which case the ultra sound transverses the pipe four times, or in Z-method in which case the transducers are mounted on opposite sides of the pipe and the ultra sound transverses the pipe only once. The selection of mounting method depends on pipe and liquid characteristics. When the flow meter works, the two transducers transmits and receives ultrasonic signals amplified by multi beam which travels firstly downstream and then upstream (Figure 1). Because ultra sound travels faster downstream than upstream, there will be a difference of time of flight( $\Delta t$ ). When the flow is still, the time difference ( $\Delta t$ ) is zero. Therefore, as long as know the time of flight both downstream and upstream, we can work out the time difference, and then the flow velocity (V) and flow volume (Q) via the following formula.

$$V = K \times D \times \Delta t$$

$$Q = S \times V$$

### Whereas:

K = Constant

D = Distance between the two transducers

S = pipe cross section

V = Liquid velocity

$\Delta t$  = Difference in time of flight

Q = flow rate

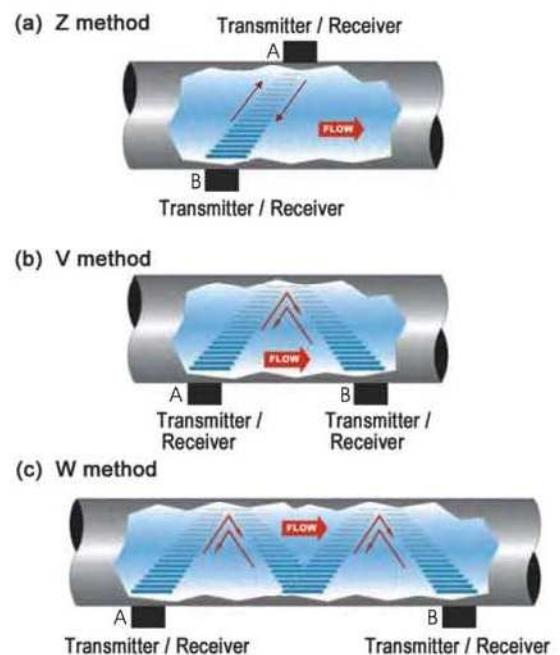


Figure 1

## Clamp-on Ultrasonic-Flowmeter Series IS210-S

Series IS210-S wall-mount Clamp-on Transit Time Ultrasonic Flow Meters provide abundant capabilities for accurate liquid flow measurement from outside of a pipe. It utilizes state-of-the-art technologies in ultrasonic transmission receiving, digital signal processing and transit-time measurement. The proprietary signal quality tracking and self-adapting technologies allow the system to optimally adapt to different pipe materials automatically.

The flow meters of the IS210 family are carefully designed with their user-interfaces self-explanatory and their operation simple, requiring no special skills or tools.

Due to the non-invasive nature of clamp-on transducers, there is no pressure drop, no moving part, no leaks, and no risk of contamination or corrosion.

### Features:

- ◆ Non-invasive clamp-on style transducers
- ◆ Bi-directional flow measurement
- ◆ Able to measure positive, negative and net total flow
- ◆ Standard type and Explosion-Proof type are available
- ◆ Can measure pipe sizes from 12 mm to 4570 mm
- ◆ Measurable temperature range: -40°C ~ 250°C
- ◆ Up to 8GB SD card data logger optional
- ◆ Easy operation and quick installation



### Applications:

- ◆ Water (hot water, cooling water, De-ionized water, potable water)
- ◆ Petroleum products
- ◆ Chemicals, including alcohol, acids, etc.
- ◆ HVAC, energy measurement system
- ◆ Beverage, food and pharmaceutical processors



## Transducer Type „K“

K mode transducers utilize the Round-Clamp method, and the transducers' transmitting and receiving sides are connected with the pipe surface thoroughly, so that this series have the features of

- Reliability
- Enough coupling area
- Excellent stability.



Pipe-Ø	Mat.	A	B	C	D	Measuring Range
1/2" (12-15 mm)	PTFE	50	42	44	18	2-100 LPM
3/4"-1" (20-25 mm)	PTFE	50	53	44	28	4-375 LPM
1 1/4" (32 mm)	PTFE	50	63	44	35	15-570 LPM
1 3/4" (40 mm)	PTFE	66	71	44	45	18-830 LPM
2" (50 mm)	PTFE	74	92	66	56	30-1500 LPM

## Technical Specifications:

Transmitter	Power Supply	Standard: 10...28 V DC / 2,5 VA max.; 115/230 V AC 50/60 Hz $\pm$ 15 % / 5 VA max.; Solar energy: 12 V DC
	Velocity	-12...12 m/s (-40...40 ft/s), bi-directional
	Display	4 line x 16 English letters LCD back lit, can display total flow, flow rate, velocity and meter running status etc.
	Units Rate Totalized	User Configured (English and Metric) Rate and Velocity Display (FWD, NET, REV or BATCH) gallons, ft <sup>3</sup> , barrels, lbs, Liters, m <sup>3</sup> , kg
	Output	4...20 mA, OCT Pulse, Relay, RS232C or RS485, options: Up to 8 GB Data logger, Hart+(4...20 mA), MODBUS Protocol etc.
	Accuracy	$\pm$ 1,0 % of reading at rates > 0,5 m/s $\pm$ 0,005 m/s of reading at rates < 0,5 m/s
	Sensitivity	Flow Rate: 0,0003 m/s (0,001 ft/s)
	Repeatability	0,2 % of reading
	Dimensions And Weight	Standard: 241 x 193 x 76,5 mm, Weight: < 2,5 kg Ex-Version: 255 x 220 x 110 mm, Weight: < 5,0 kg
	Security	Keypad lockout, access code enable
Transducer	Liquid Types Supported	Virtually most any liquid containing less than 2 % total Suspended solids (TSS) or aeration
	Suited Liquid Temperature	Std. Temp. Transducer: -40...+121 °C High Temp. Transducer: -40...+250 °C
	Cable Length	Standard: 6 m (20 ft); Opt: max. 300 m (990 ft)
	Pipe- $\varnothing$	Sensor Type S: 12...50 mm Sensor Type M: 40...1000 mm (Standard) Sensor Type L: 1000...4570 mm Sensor Type K: 12...50 mm
	Dimensions and weight	Type S: 42 x 25 x 25 mm; weight < 0,2 kg Type M: 60 x 43 x 43 mm; weight < 0,5 kg Type L: 80 x 53 x 53 mm; weight < 1,0 kg
Accessories	Couplant	Dow Corning 111 or 732 (112 for high temp.)
	Data Logger	Optional: 512 MB to 8 GB SD card
	S-S Belt	According to the pipe line size



## Parts and Dimensions



Standard Transmitter



Explosion-proof



Transducer Type L



Transducer Type S



Transducer Type M  
(Standard)



Transducer Type K



S-S Belts




Couplant




Elastic Belts


**Parts and Dimensions / Continuation**

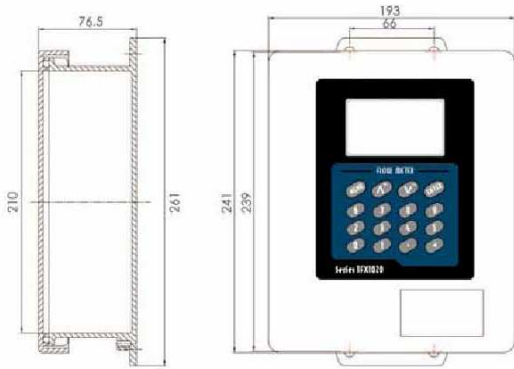


Standard Transmitter

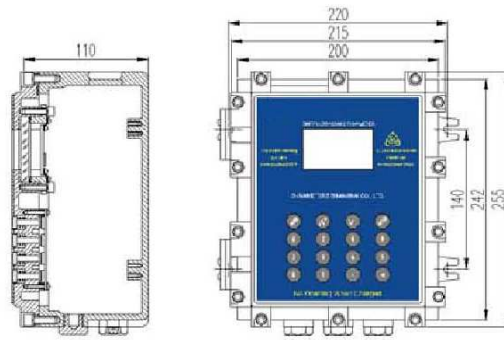


Explosion-proof Transmitter

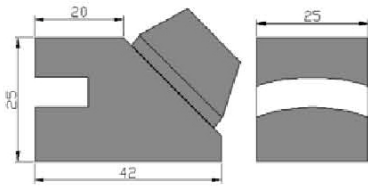

Transducer Type S

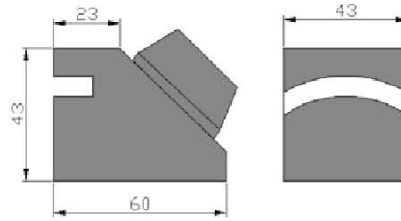


Transducer Type M

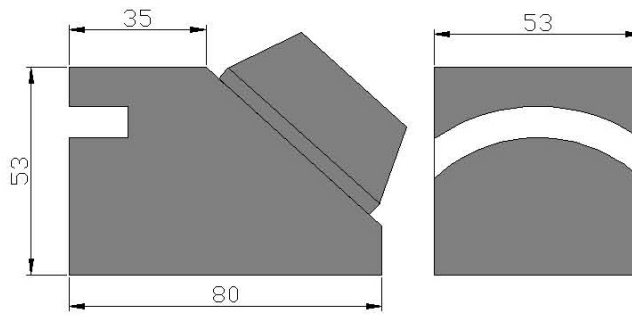

Transducer Type L

## Wiring Terminals

Conduit holes:  $\frac{1}{2}$ " NPT or  $\frac{3}{4}$ " NPT can be selected.  
 Hosuing: IP 67; NEMA4X, aluminium alloy casting.

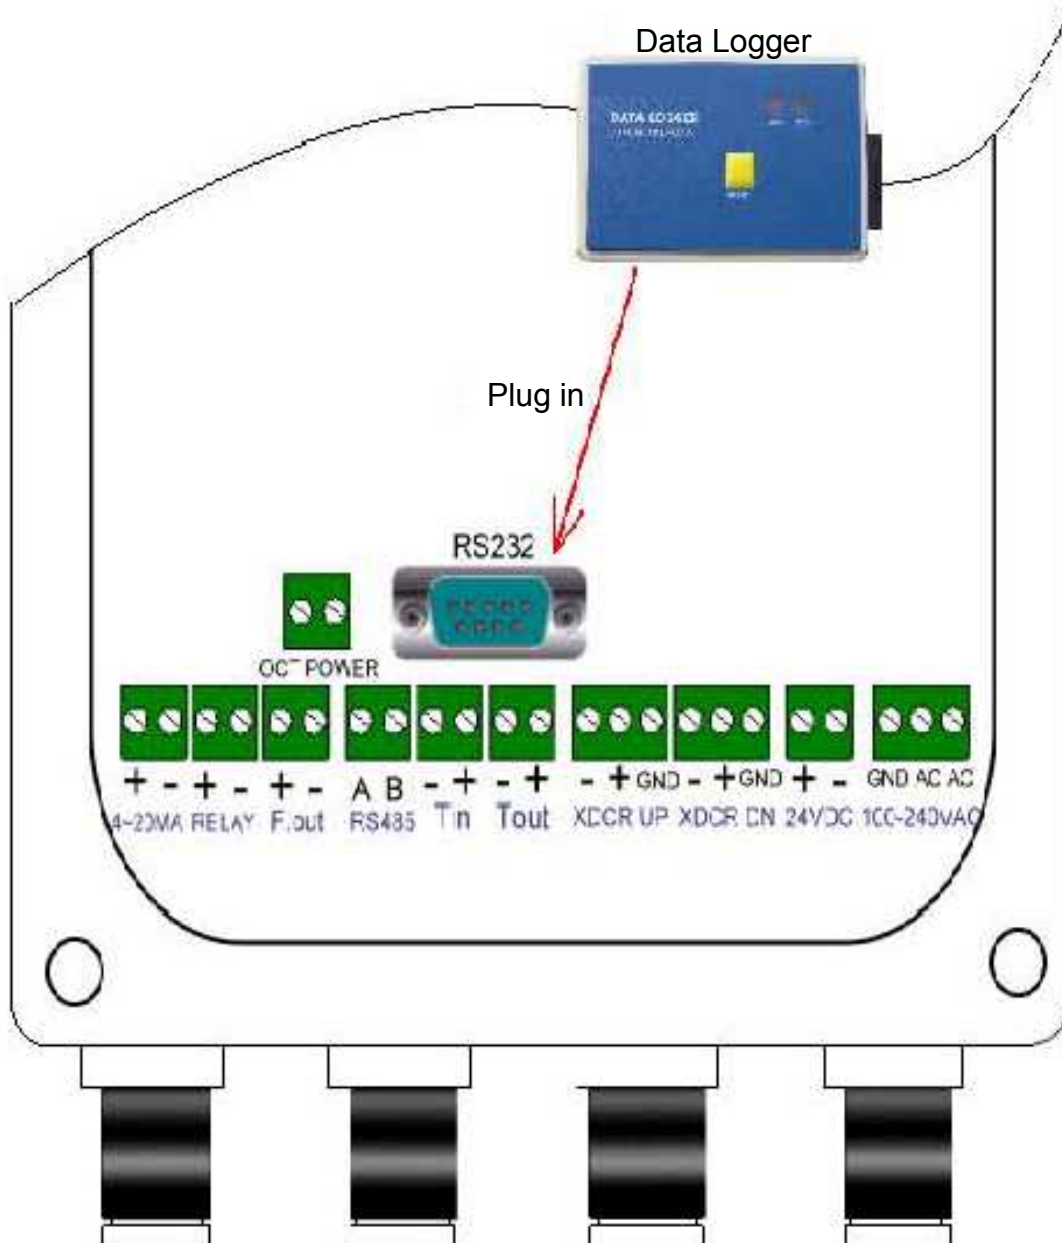


Besides the products covered by this brochure, Intra-Automation GmbH also manufactures other high-quality and high precision instruments for industrial measurement tasks. For more information, please contact us (contact details on the backside of this brochure).

### Flow Measurement



Itabar®-Flow-Sensor

### Level Measurement

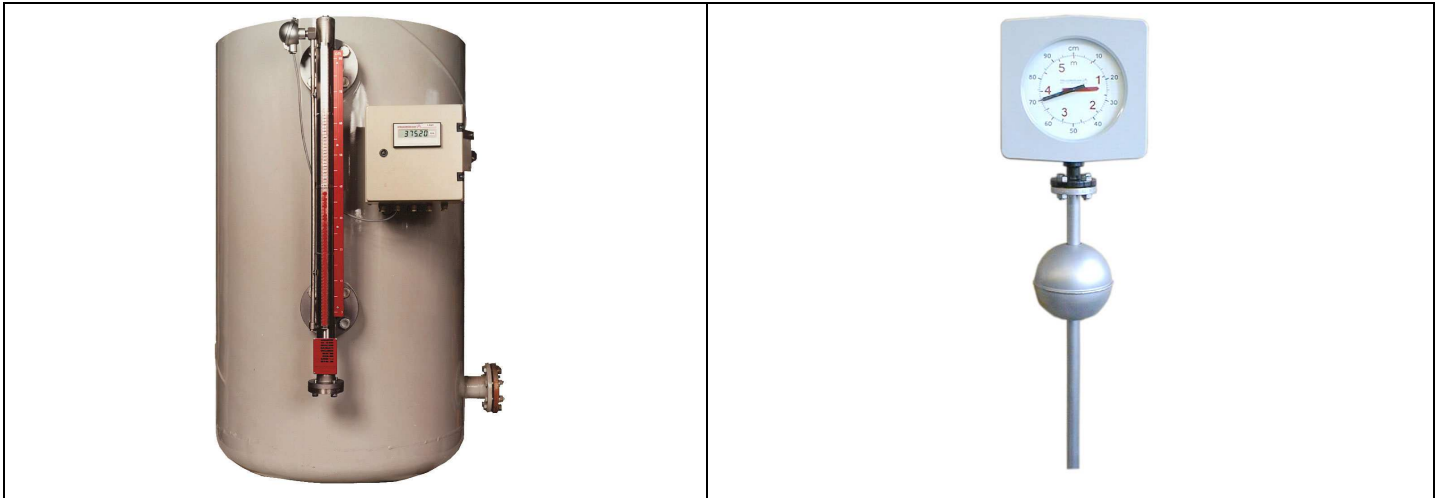

ITA-mag. level gauges

MAGLINK level indicators

### Other measurement tasks:



DigiFlow Flow and Level Computers

IntraCont digital Controllers

IntraDigit digital indicators



# INTRA-AUTOMATION



MESS- UND REGELINSTRUMENTE / MEASUREMENT AND CONTROL

Otto-Hahn-Str. 20  
41515 Grevenbroich  
GERMANY

Telefon: 0 21 81 – 75 66 5 – 0  
Fax: 0 21 81 – 6 44 92

e-Mail: [info@intra-automation.de](mailto:info@intra-automation.de)

Internet: [www.intra-automation.de](http://www.intra-automation.de)