

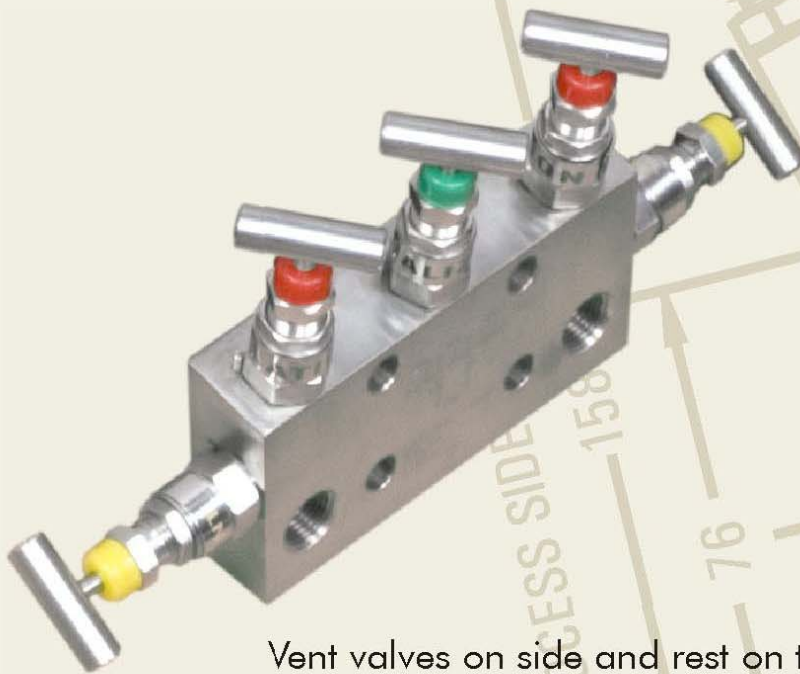



Five Valve Manifold, Direct Mounting

Model No.G5 VMPF 2



Vent valves on side and rest on top,
screwed process connection

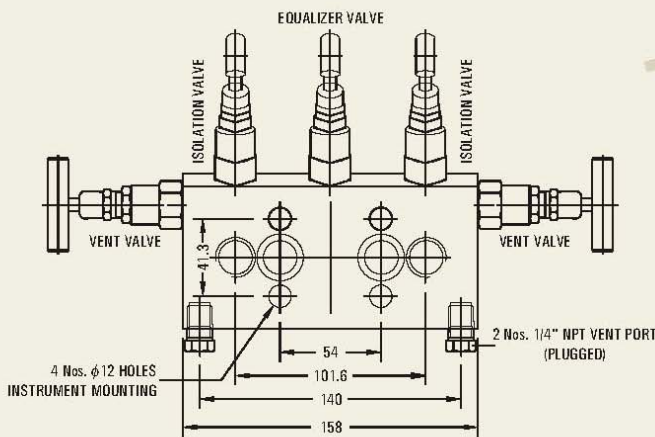

DESCRIPTION

Five Valve Manifold Model G5 VMPF 2 is designed for direct mounting on differential pressure instruments. The manifold incorporates two process isolation valves, one equalizer valve and two drain/vent valves with separate connections. The process connection is through threaded connections for tube or pipe assembly. The valves are suitably angled to prevent fouling with the instrument. Dimensions shown are for the standard 54 mm or 2 1/8 inch instrument connection centres but also available for other centres on request.

Connections : Process : 1/2" NPT (F)
Instrument : Flanged
Drain/Vent : 1/4" NPT (F)

Test Pressure : @ 25°C Room Temperature
Hydrostatic : Body - 620 bar
Seat - 415 bar
Pneumatic : Seat - 40 bar

Gland Packing : PTFE : Standard
: GRAPHOIL: Temperatures above 180°C

Material : A 105, A 182 / A 479 GR F 304,
A 182 / A 479 GR F316, Monel, Hastelloy

Finish : CS zinc plated. SS Natural

Option : Test Port on process side with plug.

Accessory : Mounting Bolts - IS : 1364 - 1960 - 4 Nos
Interface seal - PTFE / VITON - 2 Nos