

Single Acting Type Pneumatic Valve Positioner Model HTP

Introduction

Model HTP pneumatic valve positioner provides improvement of dynamic and static characteristics of control valve and satisfies many requirements referring to such process needs as split range action of actuator, changing from direct to reverse action and characteristics change.

Standard specifications

Model : HTP-□□

Positioner action

D:Direct (Output air pressure increases with input signal increase)

R:Reverse (Output air pressure decreases with input signal increase)

Input signal

1:20 to 100 kPa/20 to 98 kPa (Standard)

2:20 to 60 kPa

3:60 to 100 kPa

Output characteristics :

Linear, Equal percentage and Quick opening.

Supply air pressure :

140 to 390 kPa {1.4~4.0 kgf/cm²}

Air consumption :

7 Nℓ /min. or under (normal state, supply air pressure

140 kPa {1.4 kgf/cm²})

Maximum capacity of air flow :

2000 Nℓ /min. (supply air pressure 140 kPa {1.4 kgf/cm²})

Pneumatic tubing connection : Rc1/4 internal thread

Ambient temperature : -25 to +60°C

Performance :

Accuracy ; ±1% FS

Dead band ; Within 0.1% FS

Travel adjustable range ; 12 to 100 mm,
6 to 12 mm (optional)

Stroke speed(max.) :

10 mm/sec. (when with model VA1 actuator.)

Additional specifications :

With pressure gage and bypass (standard)

With pressure gage

Without pressure gage and bypass

Corrosion-resistant and silver finish :

(Semi-standard specification Y138. As specified when ordering.)

Corrosion-resistant (Acryl baking) finish (Y138A);


Resistance for corrosive gases.

Corrosion-proof (Epoxy baking) finish(Y138B);

Resistance for corrosive liquids.

Silver-normal (Acryl baking) finish (Y137C);

Protection for temperature rise of device caused by direct sun light, radiation heat, etc.

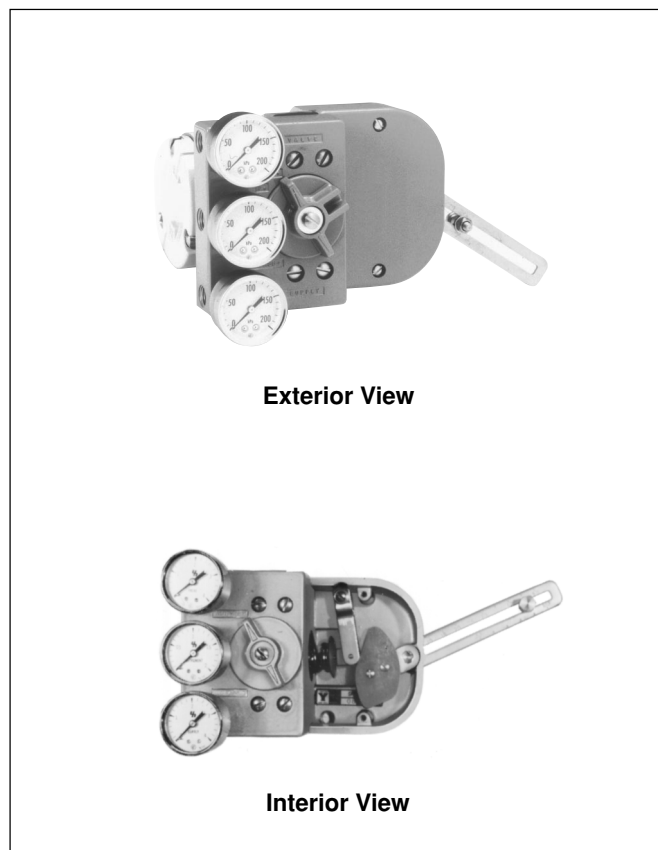

Exterior View

Interior View

Silver-corrosion-resistant (Acryl baking) finish (Y138D);

Protection for above-mentioned temperature rise and resistance for corrosive gases.

(Notes:Silver finish is not applicable for alkaline gases)

Weight :

2.8 kg (standard model)

Housing material :


Aluminum alloy casting

Finish :

Acryl baking finish (For corrosion-resistant and silver finish, refer to the optional specification.)

Color of finish :

Dark beige (Smooth tone finish)

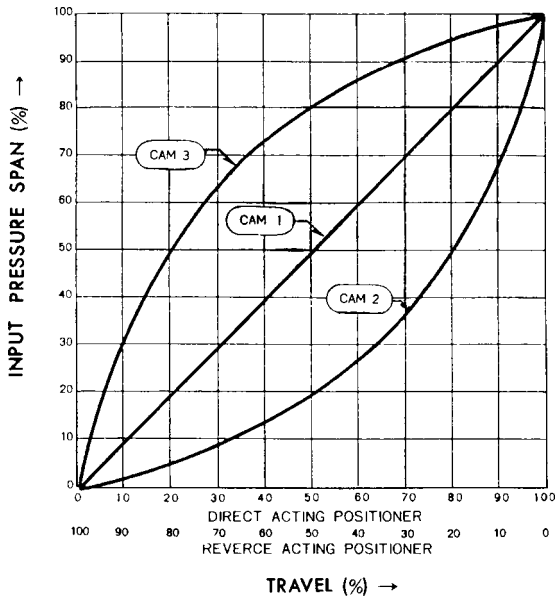

Cam characteristics :

Linear (cam 1, standard) and two other kinds. By selecting the other two cams, valve characteristics can be approximated as follows:

(1) For reverse acting valve

- Cam 2
 - Linear characteristic valve plug
 - > Quick opening characteristic
 - Equal percentage characteristic valve plug
 - > Linear characteristic

- Cam 3
 - Linear characteristic valve plug
 - > Equal percentage characteristic
 - Quick opening valve plug
 - > Linear characteristic

(2) For direct acting valve

The effect of cams 2 and 3 applied to direct action valves is reversed as compared with the case of reverse action valves.

Figure 1. Cam Characteristics

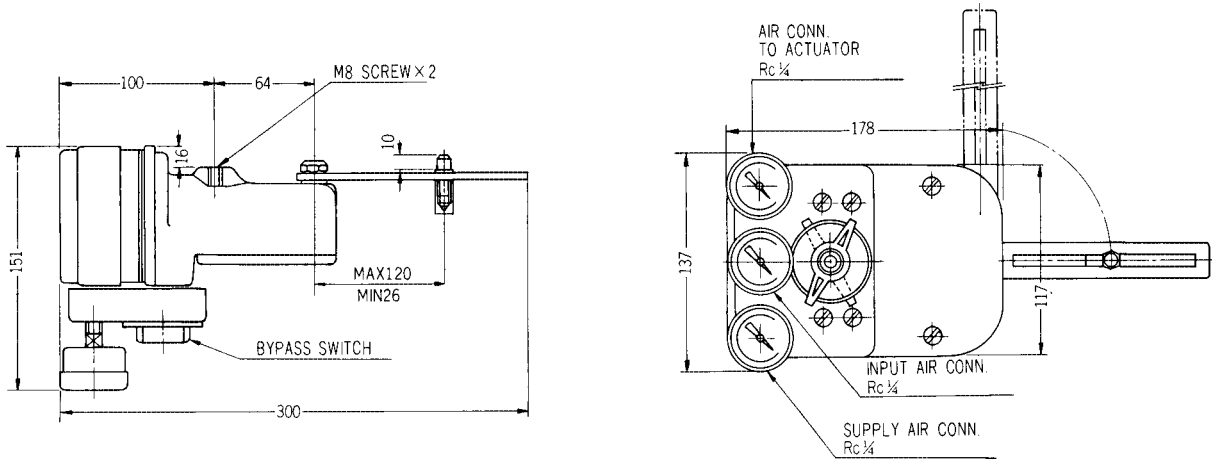


Figure 2. External Dimensions

Specifications are subject to change without notice.



Yamatake Corporation
Advanced Automation Company

1-12-2 Kawana Fujisawa
 Kanagawa 251-8522 Japan

URL:<http://www.azbil.com>

This has been printed on recycled paper.

Rev. 8 : 0704-Y/Y